

porodo



Porodo

Dashboard Windshield Exterior Phone & Camera Mount

SKU: PD-3WFPM-BK

Table of Contents

Features	2
Product Description	3
Product Overview	3
Instructions for Use	4
Warning	4
Specifications	5
Warranty	6
Contact Us	6

Before using the product, please carefully read this User Manual to guarantee correct usage and keep it secure for future reference.


Features

Quick Installation: Features a one-touch rotary design with a locking indicator for swift and efficient attachment and removal of the suction cup, enhancing your setup speed for optimal shooting. The unit folds easily for convenient portability and includes a special suction cup dust cover for protection and storage, ensuring longevity.

Strong Suction, Strong Adhesion: Our patented double-layer suction cups offer robust suction and durable adhesion, built to last. The connector rod, crafted from sturdy aluminum alloy, is designed for durability and resistance to breakage.

360° Adjustable: The adjustable double ball head supports 360° rotation, enabling versatile shooting angles in various scenarios. This flexibility allows for precision in capturing your desired perspectives. Note that the suction cup base is intended solely for non-impact activities and should not be used for dynamic sports like surfing or skiing.

Load Capacity: Capable of holding equipment up to 1kg, this suction cup mount is ideal for smooth, clean surfaces including car windshields, windows, tiled areas, and tabletops. It is not suitable for installation on rough surfaces.

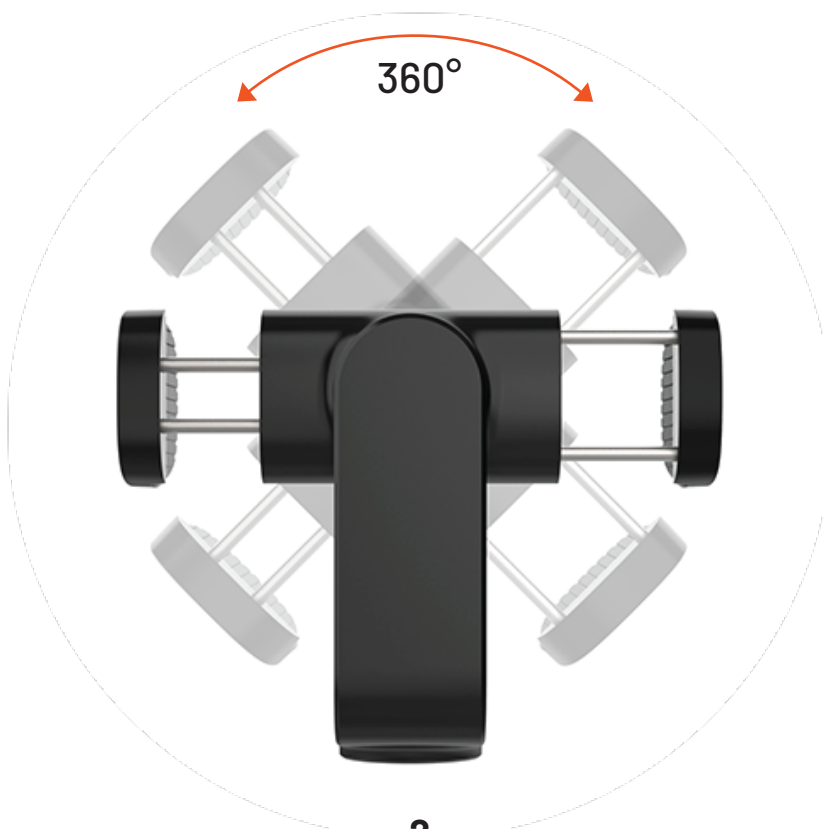

Product Description

The versatile, rotating phone holder is designed for a variety of uses including mobile photography, navigation, or viewing media. This device can be adapted for use with panoramic cameras in vehicles by removing the cell phone clamp and connecting via standard 1/4 screw threads. The suction cup mounts reliably on any dry, flat, and clean surface. It features a robust double-layer suction cup design that provides secure, long-lasting stability whether used in vehicles or for everyday purposes. The holder utilizes a press-twist mechanism that allows for quick and efficient setup or removal, enhancing your ability to capture moments without hassle. Its adaptable double ball head design allows precise adjustments to meet various photographic or viewing needs. Included with the suction cup is a specially designed dust cover that helps prevent scratches and dust accumulation, thereby extending the product's longevity. The suction cup's static load capacity is 1kg, with a dynamic capacity of 0.3kg. For optimal safety, we recommend using this product with a safety lanyard. When using in a vehicle, maintain speeds below 80 km/h, operate only on flat surfaces, and regularly check the suction's adherence every hour.

Product Overview



Instructions for Use

- 1.** Before using the suction cup, ensure the mounting surface is dry and clean to secure proper adhesion.
- 2.** Remove the dust cover from the suction cup. Press the base of the suction cup firmly against the contact surface and rotate until the indicator shows green to lock. Remember to safeguard the dust cover.
- 3.** Gently shake the mounted unit to confirm the suction cup is securely adhered. For equipment weighing up to 1kg (static load) or 0.3kg (dynamic load), it is advisable to use a safety lanyard and limit vehicle speed to 80 km/h on flat roads. Check the adhesion status hourly.
- 4.** After use, disconnect any attached equipment from the suction cup. To dismantle the suction cup, turn the base in the opposite direction of the lock, press the release, and lift the tabs to free the suction cup.
- 5.** Once the suction cup is removed, clean its bottom and replace the dust cover to protect it from debris and damage.

Warning

- 1.** Suction Cup Mount Adaptable Device: Suitable for cell phones and panoramic cameras. Use a camera adapter for sports cameras.
- 2.** Preparation and Maintenance:
 - Before Use: Remove the suction cup dust cover.
 - After Use: Clean the bottom of the suction cup and replace the dust cover.
- 3.** Surface Compatibility: Avoid use on the following surfaces: Painted surfaces, Natural marble surfaces, Old tiles, Breathable wallpaper, Diatomaceous earth walls, Unpainted wood surfaces, Rough glass or any rough or breathable surfaces.
- 4.** Please be mindful of the maximum load capacity of the device (refer to "Specifications" section).
- 5.** Vehicle Usage Recommendations:
 - Use a safety lanyard.
 - Keep vehicle speed below 80 km/h.
 - Use strictly on flat roads.
 - Check the adhesion status of the product every hour.

- 6.** Activity Restrictions: Suitable only for non-impact activities. Avoid use during surfing, skiing, or other impact sports.
- 7.** Temperature Range: Operable within -10°C to 50°C. Do not use outside this temperature range.

Specifications

Product Name	Porodo Dashboard Windshield Exterior Phone & Camera Mount
SKU	PD-3WFPM-BK
Dimensions	88×95×230mm
Material	Nylon + Aluminum Alloy
Clip Holder Size	60 to 110mm
Load Capacity	Static: 1kg, Dynamic: Up to 0.3kg
Temperature	-10°C to 50°C



Warranty

Products that you buy directly from our **Porodo** website or shop come with a 24-month warranty.

When you buy **Porodo** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at **<https://porodo.net/warranty>** and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check:

<https://www.porodo.net/warranty>

Contact Us

If you have any questions about this Privacy Policy, please contact us at:

info@porodo.net

Website: **porodo.net**

Service Support: **support@porodo.net**

Instagram: **[porodo](https://www.instagram.com/porodo)**