

# **GREEN LION**

## **USER MANUAL**



**PORTABLE  
MIFI ROUTER**


# Getting Started

Thank you for choosing GL-M12, it will provide you a high-speed 4G and Wi-Fi 6 experience.

## Note

This guide briefly describes the appearance, using procedures and how to set the management parameters of GL-M12.

## Getting To Know Your Device

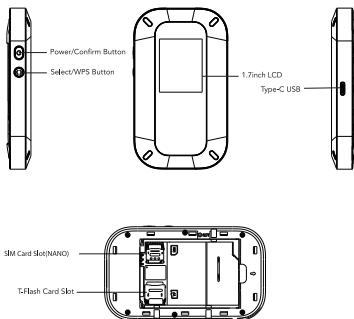

## How to use

1. Insert SIM card (Nano) and turn on the device.  
**It will connect to the network automatically.**

Press Power Button for 6s to turn on device, LCD will display "MiFi is starting up" when device is turning on.

## 2. Connect GL-M12 via Wi-Fi or USB.

### A. Wi-Fi connection:

- ① Select the Wi-Fi network (SSID) of this device. The default SSID is displayed on the LCD "WiFi CFG" menu, or you can find it on device sticker.
- ② Input the Wi-Fi password. The default password you can see from the LCD "WiFi CFG" menu. You can input password strings directly, or scan 2D code with your smartphone. Below 2D code is reference only.



### B. USB connection:

- ① Connect the device to a PC via USB cable.
- ② The PC can connect to the mobile network without having to install any drivers.

### C. Connect to Wi-Fi via WPS:

If your device supports WPS(Wi-Fi Protected Setup), it can be connected to M51 without having to use the password.

Press the WPS Button on this device to activate the WPS function for 2 minutes.

3. To use the storage function, please insert T-Flash Card into the slot.

Note: Supports T-Flash Card up to 32GB.

## Device management

This device can be managed with logging in the Web UI (192.168.8.1), where settings can be configured to your preference.

## How to Charge

1. Charge by power adapter.
2. Charge by PC's USB port or by power bank.


Note:

- ① There is no power adapter included with GL-M12 default packaging, please purchase one separately.
- ② Please use a suitable power adapter(5V/1A) to charge GL-M12.
- ③ Please ensure that GL-M12 is charged in an environment within the temperature range of 0 to 40℃.

## Restore Factory Settings

If you forgot your Web UI password or need to reconfigure the Wi-Fi settings of the device, there are 2 ways you can restore its factory settings.

1. Turn on GL-M12, open rear cover and press the Reset Button once, to restore factory settings.



2. Turn on GL-M12 and connect to it, then log into the Web UI (192.168.8.1), and go to Admin Settings > Factory Default Settings.

## FAQ

### 1. What should I do if GL-M12 doesn't turn on?

Please ensure battery is not exhausted, charge GL-M12 and try again. Please make sure to charge GL-M12 at 0%~40%.

### 2. What should I do if the Internet cannot be accessed?

- ① Check whether there's a signal in the area GL-M12 is being used in. (Please refer to network status).
- ② Ensure that the mobile data balance of the SIM card is sufficient.
- ③ If the issue persists, please contact after sales.

### 3. What should I do if I cannot connect GL-M12 via Wi-Fi?

- ① Ensure that the SSID and password are correct (case sensitive).
- ② Ensure that MAC address filtering is disabled.
- ③ If the issue persists, please press the reset button to restore the factory settings.

### 4. What should I do if I forgot the Wi-Fi's SSID or password?

Press the reset button to restore the device's factory settings. The default SSID and password is displayed on the LCD "WiFi CFG" menu.

### 5. What should I do if GL-M12 doesn't charge?

Check whether the power adapter and USB cable function properly. It is recommended to use a power adapter with an output of 5V/1A in combination with the original USB cable.