

PORODO
LIFESTYLE




Porodo Lifestyle
Electric Air Inflator
High-Pressure Power

SKU: PDLFST181BK

Table of Contents

List of Accessories	2
Specifications	2
Product Overview	3
Instructions for Use	4
1. Inflating Steps	4
2. Light Function	6
3. Charging Instructions	6
Air Pressure Detection	7
Factory Reset Procedure	7
Precautions	7
Disposal	8
Warranty	9
Contact Us	9

List of Accessories



Presta Valve




Ball Needle




Nozzle



Air Hose



30cm Type-C
Charging Cable




Anti-Scald
Silicone

Specifications


Input	5V/1A
Rated Power	55W
Rated Voltage	DC 7.4V
Battery Capacity	2 ×1500mAh
Charging Time	Up to 5H
Airflow Rate	16L/min

Inflation Pressure	3-150 PSI
Cylinder Diameter	19mm
Hose	180mm Fine Braided Copper
Charging Cable	30cm USB-C
Product Size	71 x 44.7x114.5mm
Product Weight	390g
Model Number	LFS181

Product Overview

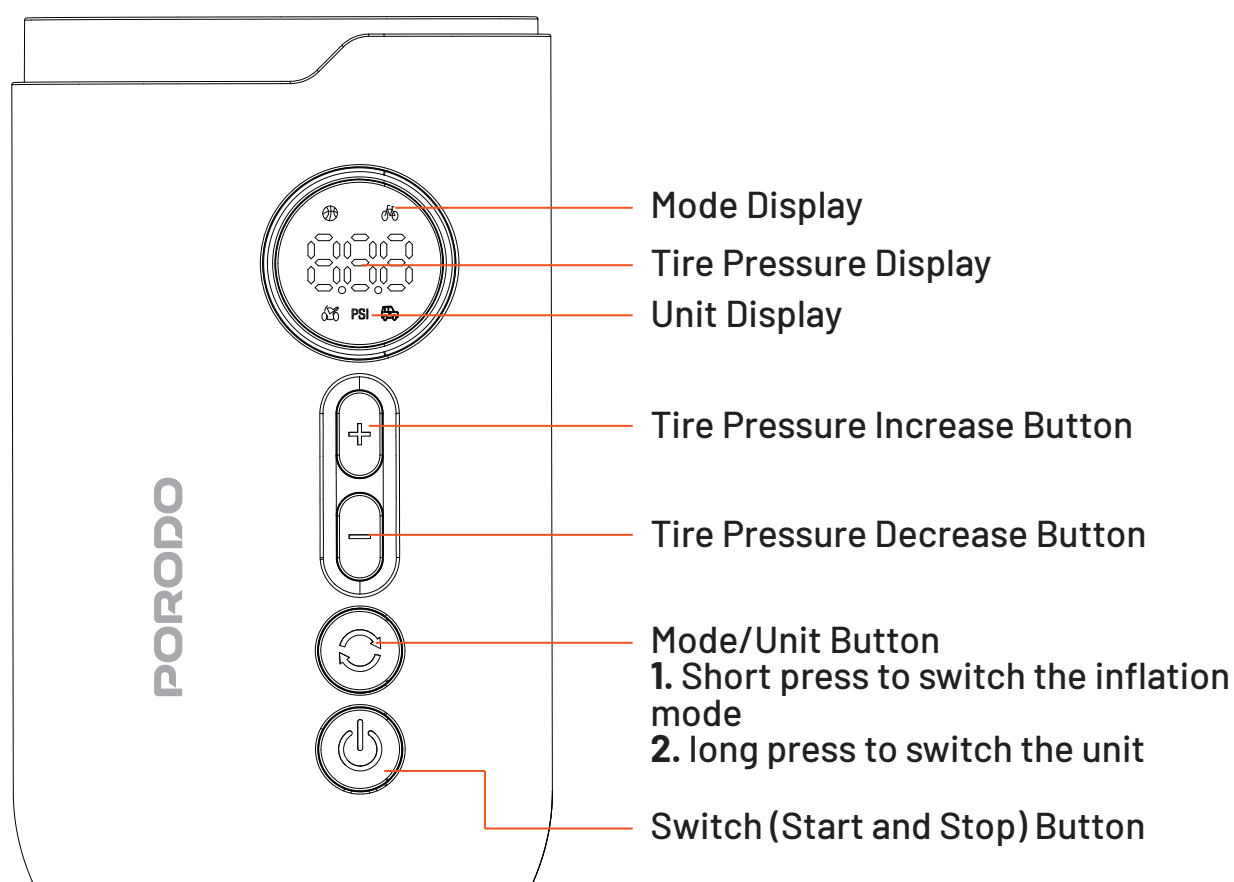



Front View




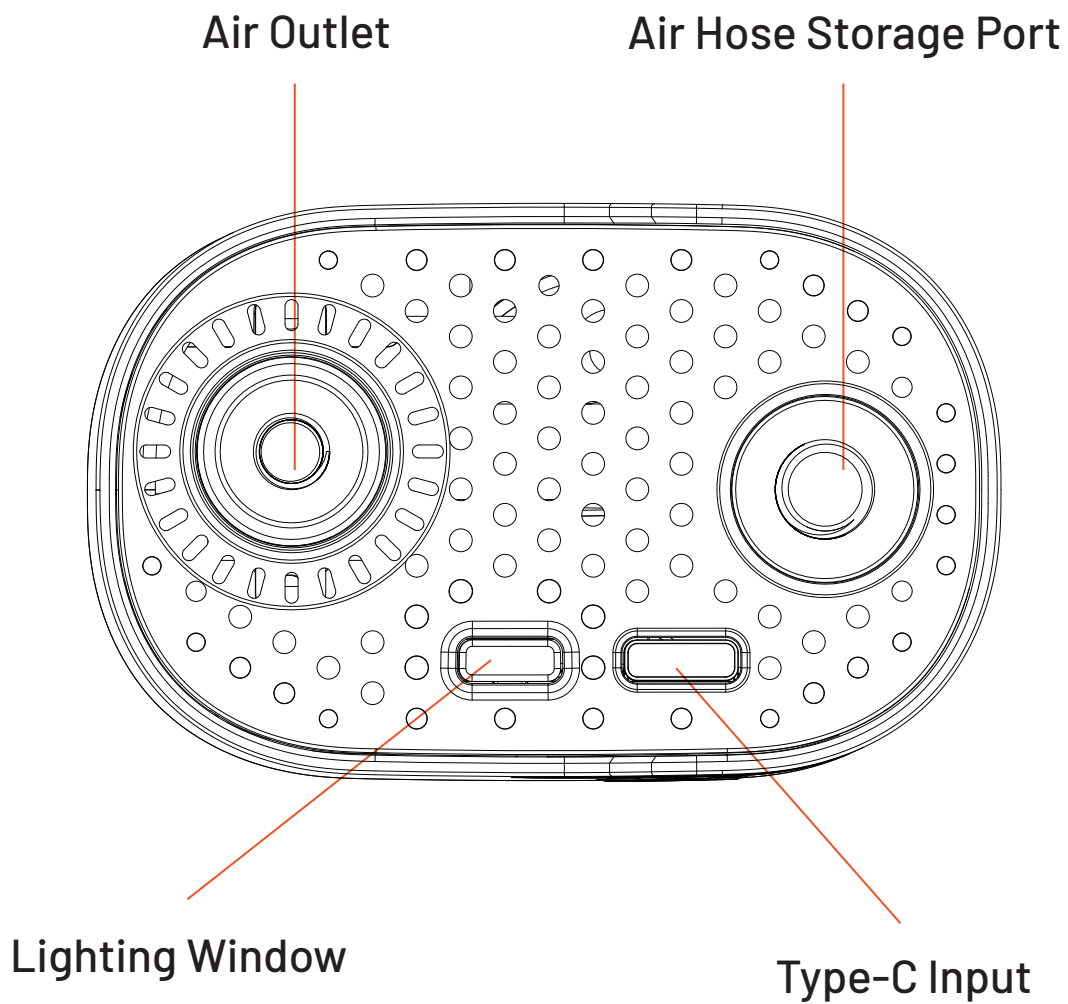


Top View

Instructions for Use

1. Inflating Steps

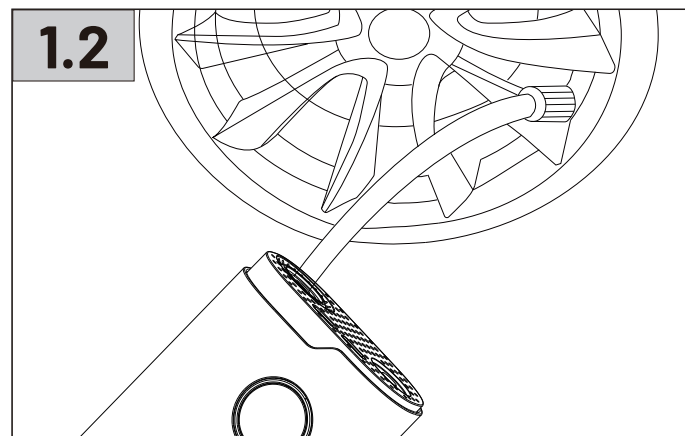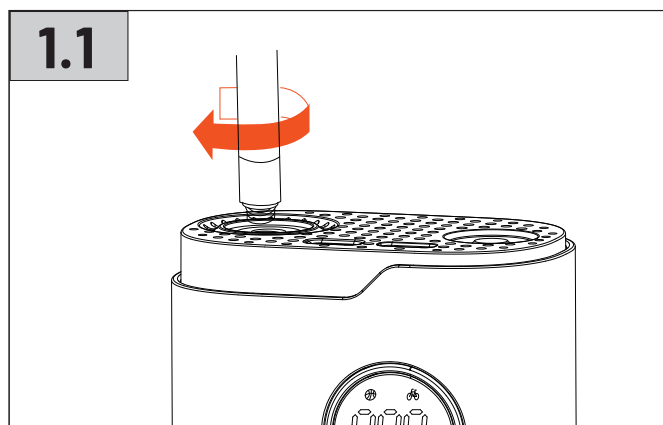

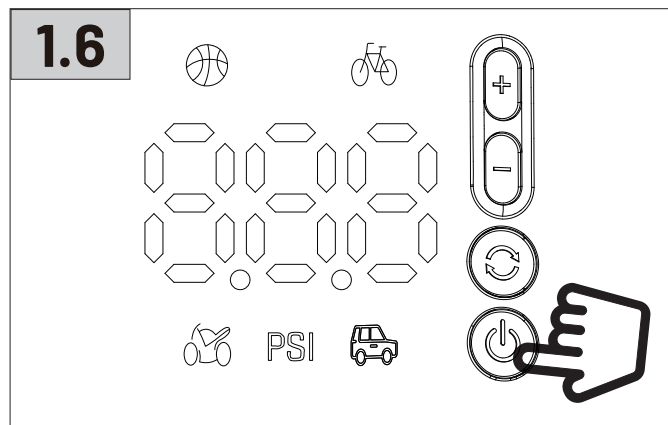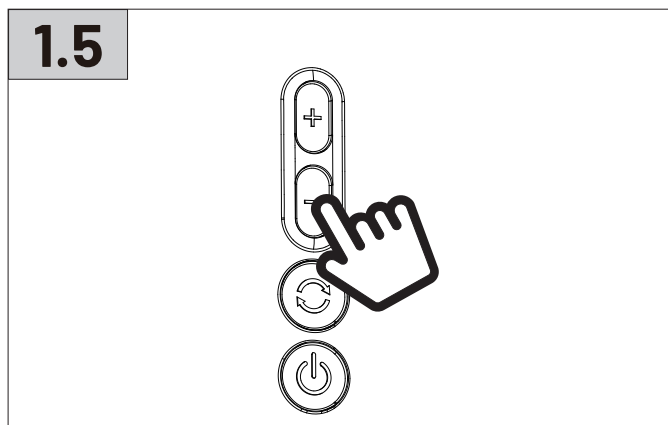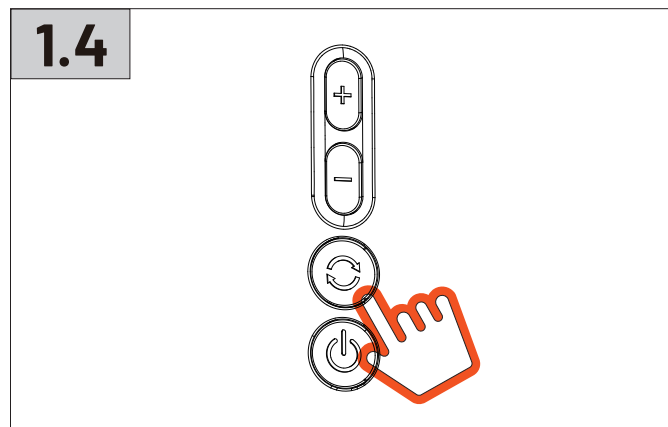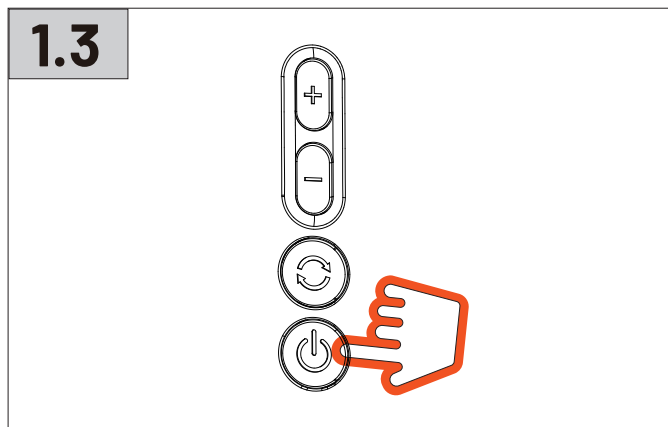




1.1 Screw the air hose clockwise to securely attach it.

1.2 Connect the air hose clockwise to the car's inflation valve.

1.3 Press and hold the power button for 3 seconds to turn on the machine.






1.4 Short press the mode button () to switch between the five inflation modes. Long press the mode button () for 2 seconds to turn the light on/off.

1.5 The "+" and "-" buttons allow you to manually increase or decrease the preset tire pressure. Each press adjusts the pressure by 0.05 Bar, 0.5 Psi, 0.05 Kg/cm², or 5 Kpa.


1.6 To set the desired tire pressure, short press the Mode Button (). The machine will begin inflating. Once the preset pressure is reached, it will automatically stop.


Note: The machine will automatically shut off after 2 minutes of continuous inflation or 90 seconds of standby.

Inflating Modes:


Mode	Default Pressure Values	Adjustable Range
	Car Mode: 36 Psi	Car Mode: 26-50 Psi
	Bicycle Mode: 45 Psi	Bicycle Mode: 30-120 Psi
	Motorcycle Mode: 32 Psi	Motorcycle Mode: 26-45 Psi
	Ball Mode: 9 Psi	Ball Mode: 4-16 Psi
	Free Mode: Preset Pressure Value	Free Mode: 3-150 Psi

2. Light Function




- 2.1 Press and hold the mode button () for 2 seconds to activate the white light.
- 2.2 Press again to deactivate the light.

3. Charging Instructions



- 3.1 Fully charge the device before the first use.
- 3.2 Use the provided charging cable to connect the device to a 5V USB adapter for charging.



3.3 Battery Status Indicators:

Red: $0\% < \text{battery} \leq 30\%$

Red and Purple: $25\% < \text{battery} \leq 50\%$

Red, Purple, and Blue: $50\% < \text{battery} \leq 75\%$

Red, Purple, Blue, and Orange: Full charge

Tip: To extend battery lifespan, charge the device at least once a month.

Air Pressure Detection

When the pump is powered on and the air hose is connected to the inflation pressure test object, the first line on the display will show the current pressure.

Factory Reset Procedure

To restore the device to its default settings, press the "+" and "-" buttons simultaneously for 2 seconds.

Precautions

1. This product is not a toy and should not be used by children. Users are advised to be over 16 years of age. During the inflation process, please ensure a safe distance between children and the inflator.
2. The product contains a non-removable lithium battery. It is strictly prohibited to throw the product into fire or abandon it. Doing so may lead to risks of spontaneous combustion or explosion, especially if the battery is overheating, impacted, or exposed to water. Always avoid exposure to high temperatures, such as leaving the product in a car.
3. The storage temperature should not be below -10°C or exceed 45°C . Extreme

temperatures can shorten the product's lifespan or damage the internal battery.

4. If the product is not used for a long period, it is recommended to charge it at least once every three months to prevent battery degradation.

5. The product features a built-in DC motor, which may generate electric sparks when in use. Ensure it is not operated in flammable or explosive environments.

6. If any abnormal noises are heard or the temperature of the product becomes excessively high while in use, immediately stop operation.

7. Never leave the product unattended while inflating. Ensure the inflation pressure is not set too high, as this may cause the tire to burst.

8. Use the product in a dry and clean environment. Sediment, sand, and other contaminants may damage the product. Note that the product is not waterproof and should not be used with water.

9. Before setting the inflation pressure value, verify that the correct measurement unit is selected to avoid potential tire overinflation.

10. Common Unit Conversion: 1 bar = 14.5 psi = 100 kPa = 1.02 kg/cm²

Disposal

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.



Warranty

Products that you buy directly from our **Porodo** website or shop come with a 24-month warranty.

When you buy **Porodo** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at **porodo.net/warranty** and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check:
porodo.net/warranty

Contact Us

If you have any questions about this Privacy Policy, please contact us at:
info@porodo.net

Website: **porodo.net**

Service Support: **support@porodo.net**

Instagram: **porodo**