



**GREEN LION**



# **Green Lion**

## **GP PRO + Gaming Console**

SKU: GNGPPROGAM

Model No: GL-GC8

## Table of Contents


Main Interface Overview	2
Product Overview	3
Memory Card Instructions	3
Settings	4
Indicator Light	5
RA Emulator Shortcuts	7
Reset Instructions	9
Specifications	9
Disposal	10
Warranty	10
Contact Us	10

## Main Interface Overview



1	Game Console	Upon startup, you can select "Internal Card" or "External Card" and choose the game platform to play your desired game.
2	RA Emulator	Once inside, you can choose between "Internal Card" or "External Card" and select the platform for your games.
3	Favorites	Press the START button in the game center to add a game to this section, making it easily accessible.
4	History	Previously played games will appear in this section. You can clear the history via the settings menu.
5	Search	Quickly locate games stored on memory cards. Use the X key to delete keywords and the Y key to confirm search results.
6	Settings	Includes all settings for the GL-GC8, such as language options, backlight adjustments, background settings, and more.

## Product Overview

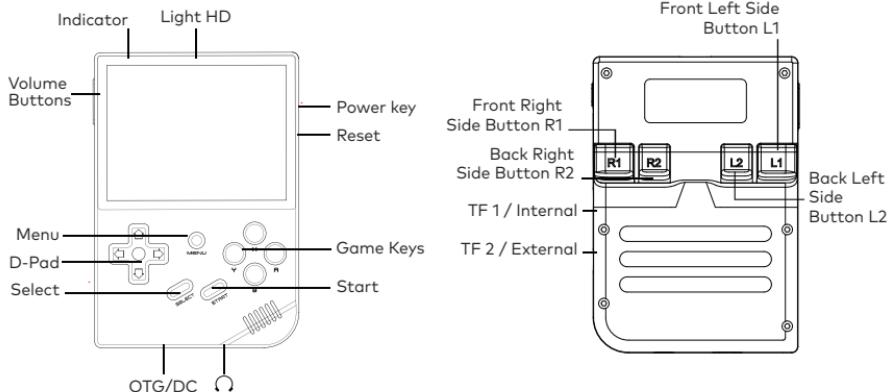

## Memory Card Instructions

Insert a FAT32-formatted memory card into the external card slot of the game console. A new folder for each platform will automatically be created. Simply place the game files into the respective folders and select the game from the game rooms.

**Supported platforms include:** ported games, PSP, PS1, DC, NDS, ARCADE, GBA, GBC, GB, SFC, FC, MAME, MD, GG, PCE, NGPC, SMS, and WSC.

## Settings

**Language Settings:** Go to Settings → Language Settings in the main menu. Available languages include Chinese, English, Japanese, Korean, Russian, French, and German.

**Backlight Brightness:** Navigate to Settings → Backlight Brightness in the main menu. You can choose from five levels of backlight brightness.

**Backlight Time:** Access Settings → Backlight Time in the main menu. Options include 1 minute, 2 minutes, 5 minutes, 10 minutes, and "always on." The screen backlight will turn off once the selected time has passed.

**Key Customization:** Go to Button Customization: Settings → Button Custom in the main menu. Here, you can modify the button mapping for both the device and the gamepad.

**Game Quality:** Options include high-definition, scan line, fast, and dot matrix. Each mode provides distinct screen filter effects for an optimized display experience.

## Indicator Light

The package includes a 5V/2A four-line charging data cable. Simply plug in the cable, and the device will begin charging.

The GL-GC8 features two indicators:

- The left light serves as the charging indicator.
- The right light functions as the working indicator.

Below is the table of light colors and their corresponding statuses:

● Green light	Working
● Red light	Low power
● Yellow light	Charging

## RA Emulator Shortcuts

Menu	Menu
Menu+R2	Fast Forward
Menu+L2	Slow Motion
Menu+R1	Save State
Menu+L1	Load State
Menu+Y	Display Frame Rate
Menu+B	Screenshot
Menu+X	Pause
Menu+START	Quit
Menu+ VOL+	Adjust Brightness
Menu+Left/Right Direction	Select Save State Slot

## Reset Instructions

- Insert the card into the card reader, then connect it to the USB port of your computer. There's no need to format the card, regardless of whether it already contains data.
- Use the provided updated link to download the necessary files to your computer.

**Note:** The file size is large. Ensure that your computer has sufficient storage space in the selected partition before downloading.

1. Download the file locally and unzip the file.

名称	修改日期	类型
cxm_gl-gc8_2025-01-10_1001	2025/1/11 15:20	文件夹
...	2024/8/19 16:39	文件夹
...	2025/1/6 15:05	文件夹
腾讯电脑管家文件搬家	2024/11/29 15:12	文件夹
34	2024/12/10 9:57	WPS PDF ...
cxm_gl-gc8_2025-01-10_1001	2025/1/11 14:55	压缩(zipped)...

2. Click on the file to continue extracting the file.

名称	修改日期	类型	大
GL-GC8	2025/1/11 15:30	文件夹	
GL-GC8.z01	2025/1/11 15:20	Z01 文件	3,
GL-GC8.z02	2025/1/11 15:20	Z02 文件	3,
GL-GC8.z03	2025/1/11 15:21	Z03 文件	3,
GL-GC8.z04	2025/1/11 15:21	Z04 文件	3,
GL-GC8.z05	2025/1/11 15:22	Z05 文件	3,
GL-GC8.z06	2025/1/11 15:22	Z06 文件	3,
GL-GC8.z07	2025/1/11 15:23	Z07 文件	3,
GL-GC8.z08	2025/1/11 15:23	Z08 文件	3,
GL-GC8.z09	2025/1/11 15:24	Z09 文件	3,
GL-GC8.z10	2025/1/11 15:24	Z10 文件	3,
GL-GC8.z11	2025/1/11 15:25	Z11 文件	3,
GL-GC8.z12	2025/1/11 15:25	Z12 文件	3,
GL-GC8.z13	2025/1/11 15:25	Z13 文件	3,
GL-GC8.z14	2025/1/11 15:26	Z14 文件	3,
GL-GC8	2025/1/11 15:26	压缩(zipped)文件...	2,

### 3. Please find the IMG format, and drag it to the Rufus tool.

d3dcompiler_47.dll	2024/6/18 9:53	应用程序扩展	4,802 KB
debug	2025/1/11 14:29	文本文档	214 KB
ffmpeg.dll	2024/6/18 9:53	应用程序扩展	2,820 KB
GL-GC8	2025/1/11 15:44	光盘映像文件	60,440,576 KB
icudtl.dat	2024/6/18 9:53	DAT文件	10,467 KB
libEGL.dll	2024/6/18 9:53	应用程序扩展	477 KB
libGLESv2.dll	2024/6/18 9:53	应用程序扩展	7,637 KB
LICENSE.electron	2024/6/18 9:53	文本文档	2 KB

### 4. Open the Rufus-3.22.exe run in the refresh tool.

5. Select your card.

6. Select the extracted IMG file.

7. Wait for the process to finish.

8. Click start.



- This tool will automatically detect your card. Verify that the capacity is correct. Press the "Select" button and choose the "IMG" format. Then, click the "Start" button to begin flashing the image. Please wait patiently for the process to complete.

- Once the progress bar turns completely green at 100 %, the flashing process is complete, and you can safely close the flashing software.
- Finally, insert your card into the device to confirm if the process was successful.

## Specifications

Model No	GL-GC8
Screen	3.5 Inch IPS, OCA, Resolution 480×640
CPU	H700 Quad-Core ARM Cortex-A53 ,1.5GHz
GPU	Dual-Core G31 MP2
RAM	LPDDR4 1GB
Storage	64GB TF/MicroSD
System	Linux
TF Card	Dual Card Slots, Support Up to 512GB
Battery	Li-Po 3.8V 2600mAh
Working Hours	7 Hours
Charging	5V/1.5A, Support C2C Charger

## Disposal

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.

## **Warranty**

Products that you buy directly from our **Green Lion** website or shop come with a 24-month warranty.

When you buy **Green Lion** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at <https://www.greenlion.net/warranty> and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check:

<https://www.greenlion.net/warranty>

## **Contact Us**

If you have any questions about this Privacy Policy, please contact us at:

Website: <https://www.greenlion.net/>

Sales: [sales@greenlion.net](mailto:sales@greenlion.net)

Service Support: [Support@greenlion.net](mailto:Support@greenlion.net)

Telegram: [@greenlion\\_global](https://t.me/greenlion_global)

Instagram: [@greenlion\\_global](https://www.instagram.com/greenlion_global)