

PORODO



Porodo

**Kids 4G Smartphone with 2.8"
Touch Display**

SKU: PD-LFST076

Table of Contents

Preparation Before Using	2
Inserting a Nano SIM Card	2
Power On/Off	2
Schematic View	3
Button Operation	3
App Connectivity	4
Function Introduction	5
Troubleshooting	7
Specifications	7
Disposal	8
Warranty	8
Contact Us	8

Before using the product, please carefully read this User Manual to guarantee correct usage and keep it secure for future reference.

Preparation Before Using

1. Use a Nano SIM Card that supports a 4G network. For more details, please consult your local operator. Ensure the unit is turned off before inserting the card.
2. The SIM card must have the GPRS function and caller ID display function activated.
3. Install the “SETRACKER2” app on your mobile phone.

Inserting a Nano SIM Card

Please utilize a Nano SIM card that supports a 4G network. Ensure that the card functions for caller ID, GPRS data flow, Internet access, and calling.

Note: Insert the SIM card only when the device is turned off to prevent any damage to the card.

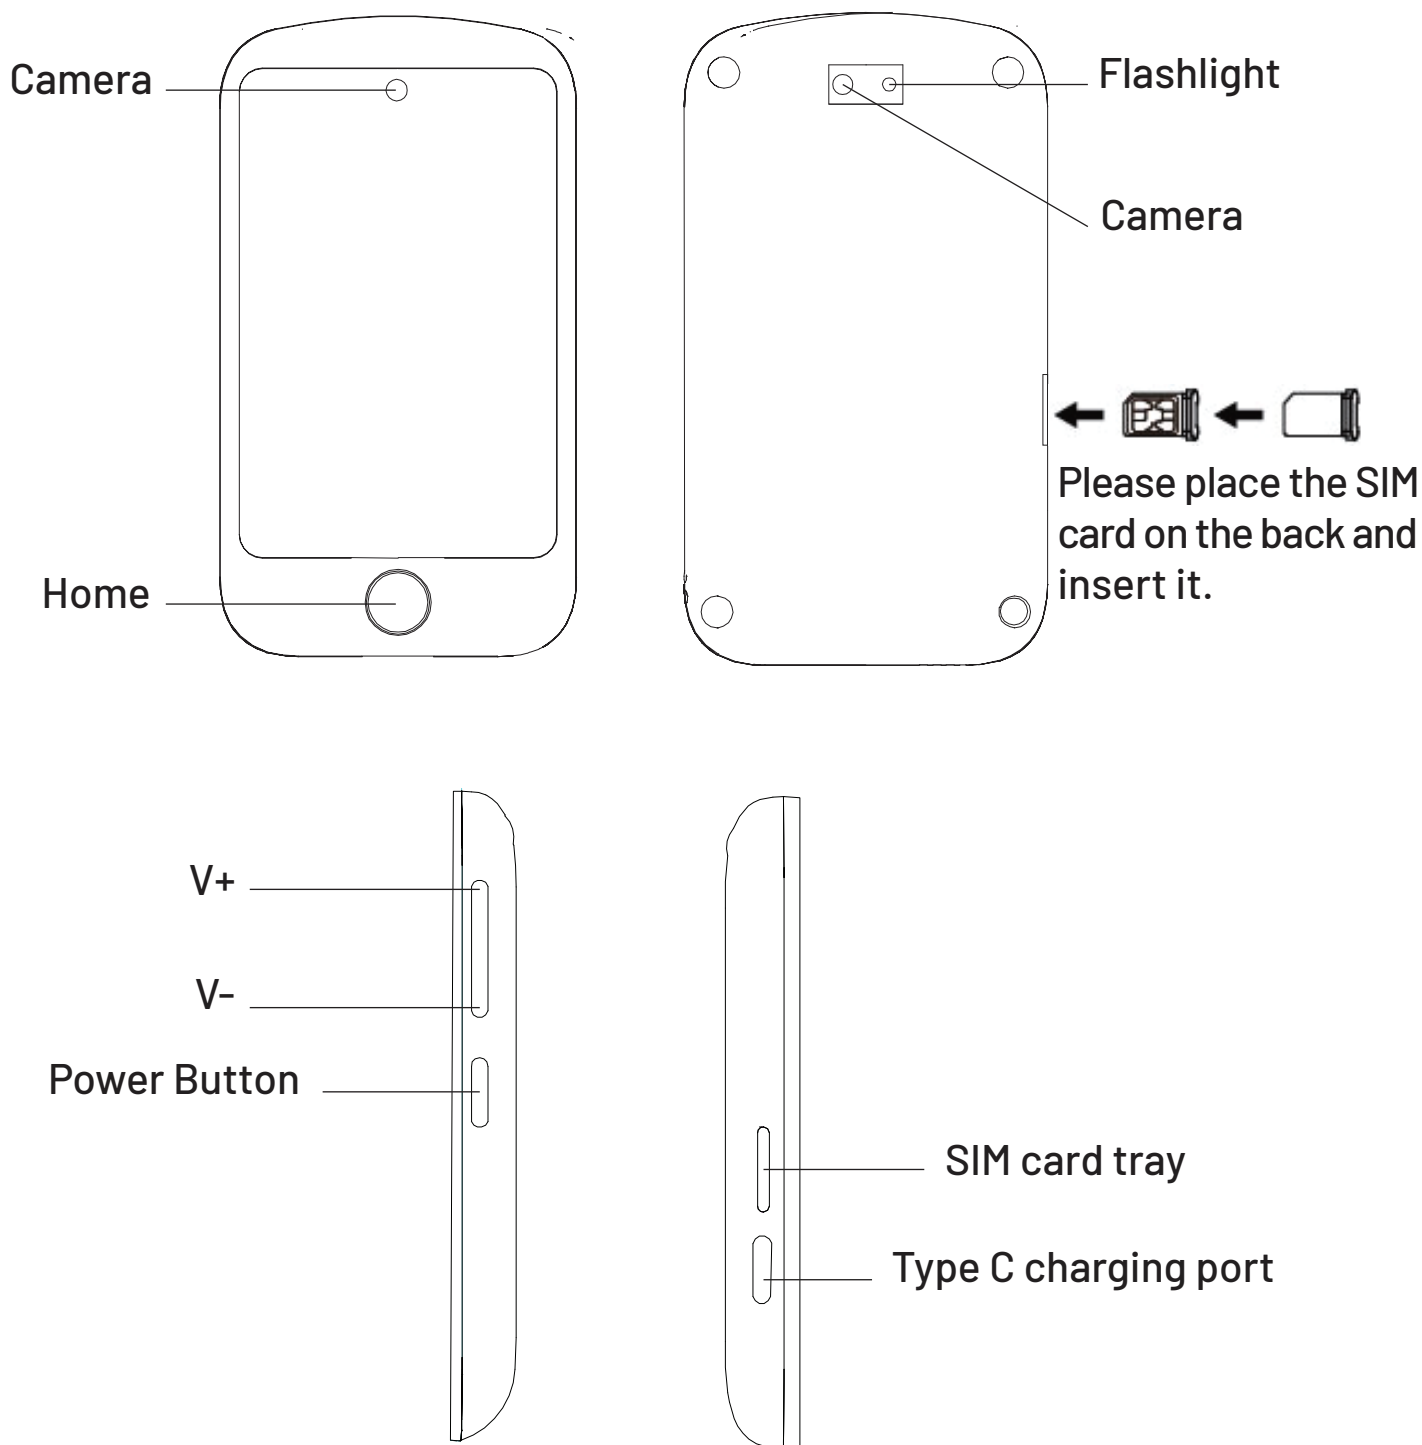
Power On/Off

Power On: To turn on the device, press and hold the power button when the device is off.

Shutdown: The device can typically be shut down remotely via the app or through the settings interface under normal working conditions. If the device lacks a SIM card or is not connected to the app, access the settings interface to shut it down.

Note: Be careful not to remove the SIM card while the device is powered on to avoid damaging the card.

Schematic View



Button Operation

Power On: When the device is off, press and hold the power button to turn it on.

SOS Feature: When the device is connected to the internet, and the SOS numbers are set via the app, press and hold the button to dial three pre-set SOS numbers. If there is no answer, the device will redial each number twice in a loop.

Home Button: Short press to return to the previous interface.

App Connectivity

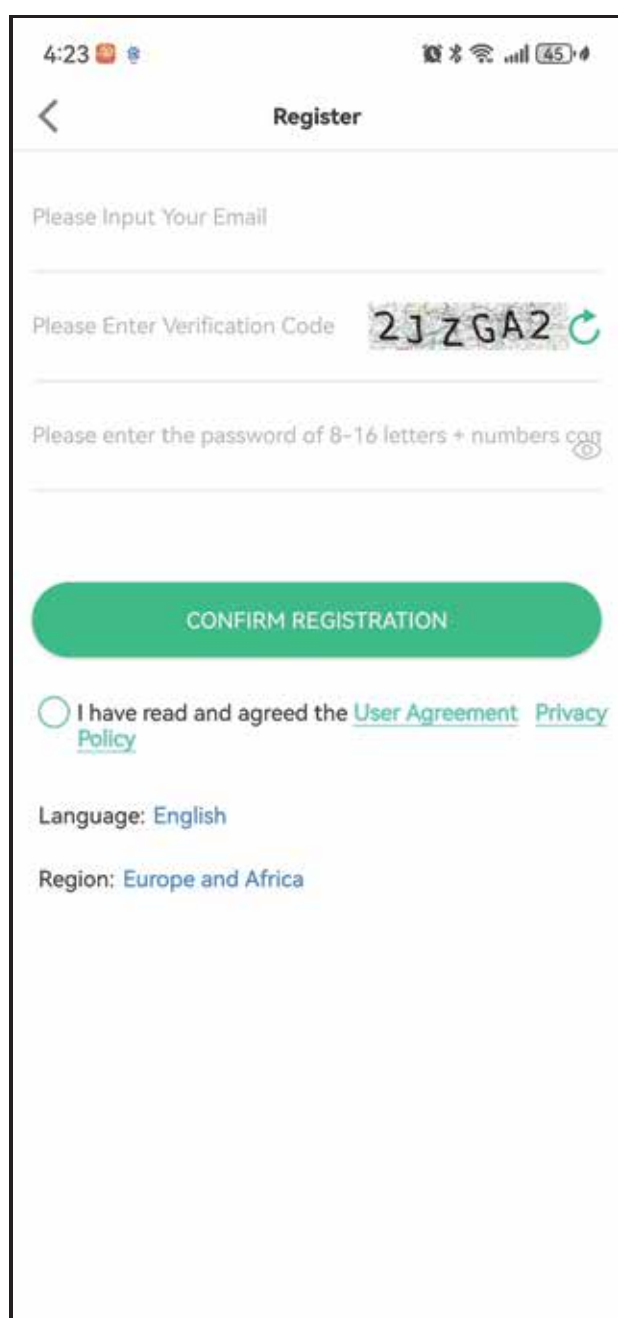
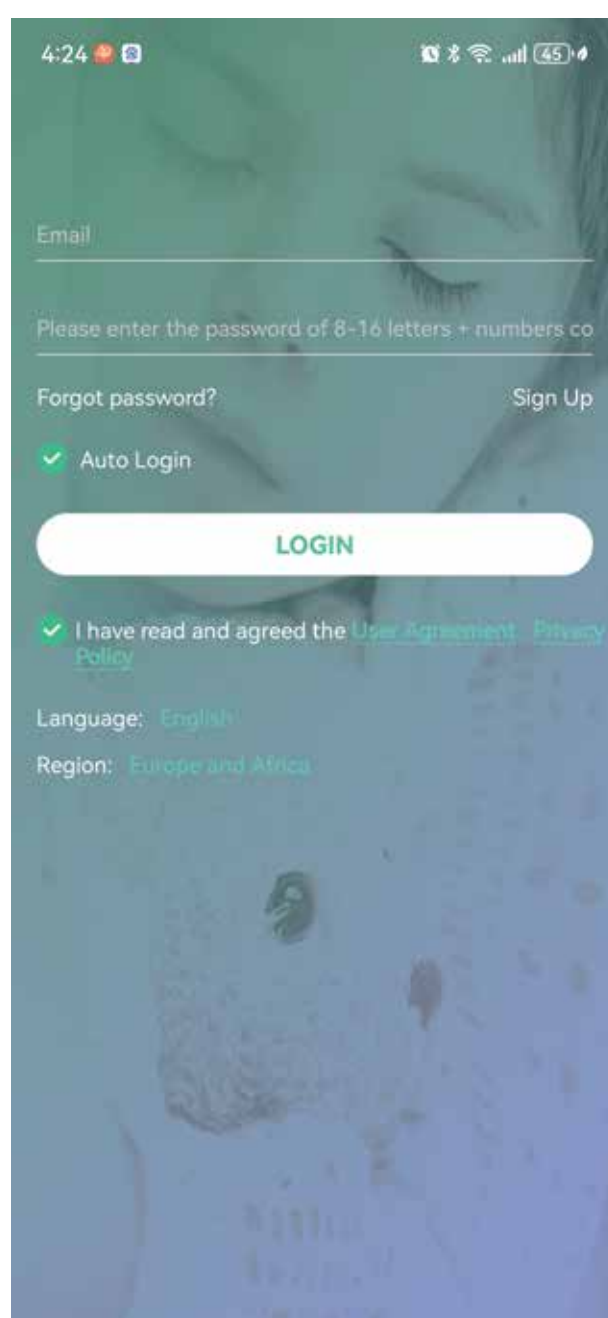
1. Downloading the App

Scan the QR code provided to download the app. You can also find the App QR code in the app download interface on the device. Alternatively search for "SETRACKER2" in Google Play or App Store.



2. Registration and Login

Follow the instructions within the app to register an account and log in properly.

A screenshot of the 'Register' screen in the app. The screen has a white background with a green header bar containing a back arrow and the title 'Register'. Below the header, there are three input fields: 'Please Input Your Email', 'Please Enter Verification Code' (with a green refresh icon and the code '2JZGA2'), and 'Please enter the password of 8-16 letters + numbers'. Below these fields is a large green button labeled 'CONFIRM REGISTRATION'. At the bottom, there is a checkbox labeled 'I have read and agreed the User Agreement Privacy Policy' and two dropdown menus for 'Language: English' and 'Region: Europe and Africa'.A screenshot of the 'Login' screen in the app. The screen has a green background with a blurred image of a person's face. The header bar is green with a white title 'Login'. Below the header, there are two input fields: 'Email' and 'Please enter the password of 8-16 letters + numbers'. Below these fields are links for 'Forgot password?' and 'Sign Up'. There is a green checkbox labeled 'Auto Login' and a large white button labeled 'LOGIN'. At the bottom, there is a green checkbox labeled 'I have read and agreed the User Agreement Privacy Policy' and two dropdown menus for 'Language: English' and 'Region: Europe and Africa'.

3. Binding the Device with the App

Once your account is successfully registered, bind the device by scanning the QR code attached to it or by manually entering the 15-digit registration code. You can find the registration code in the app's download interface on the device. Proceed to the binding settings to complete the process.



Function Introduction

GPS, Wi-Fi Positioning: Utilize the app's map to view the device's real-time location.

Footprint: Access historical tracking information.

Safety Area: Set up to three safety fences. The device will send an alarm notification if it leaves the specified range.

Alarm: Configure up to three alarms.

Contacts: Store up to 15 phone numbers in the device's phonebook, enabling calls to and from these contacts.

Voice Chat: Use the app to send voice messages and pictures from your mobile phone to the device.

Camera: Tap to take photos directly from the device.

Dialing: Supports dialing numbers and making calls. The app allows you to enable or disable this function.

Video Call: Tap to choose between a single chat or a group video chat through the app. Group chats can include up to 8 participants.

Gallery: Tap to view photos taken by the device. Photos can be shared, deleted, or edited.

Settings: Adjust various settings such as media volume, alarm volume, ringtone volume, and call volume. Other options include brightness settings, lock screen settings, reboot, shutdown, device information, model number, version number, and IMEI.

QR Code:

1. Scan the Code to Download: Tap to display the QR code, which can be scanned to download the Setracker2 app.
2. Registration Code: Tap to display the device's registration code.

Early Education:

1. Crazy Maths: Access the game by clicking on the interface and pressing "Start." The game features three levels of difficulty: simple, normal, and difficult, which can be adjusted in the settings menu.
2. Children's Early Learning: This category is divided into four sections: Characters, Fruits, Animals, and Vehicles.
3. Course Schedule: View the weekly courses (Monday to Friday) set through the app by tapping on the schedule.

Social Interaction:

1. Tap to enter the interface. Two devices can make friends by touching. Once successfully connected, the corresponding picture will illuminate.
2. You can make up to four friends with this device. Tap a friend's avatar to start a voice chat, and you can also send voice messages and pictures.
3. Long press a message received from a friend to access options like "Delete" and "Delete All."
4. Long press on a friend's picture to remove the friend from your list.

SOS Function: Set three emergency contact numbers. In an emergency, press and hold the SOS button for 3 seconds to initiate calls to these numbers in a cycle. If there is no response, the device will complete two dialing cycles before stopping.

Remote Monitoring: Activated via the app, the device can dial a preset number (typically a parent's number) to allow one-way listening. This lets the caller hear the surroundings of the child.

No-Disturb Time: Set up to three specific time periods during which all phone calls and other sounds are blocked. This function is active from Monday to Friday.

SMS Alert Setting: Control the activation of the SMS function for receiving related alarm notifications. Standard SMS charges apply.

Working Mode: The device features three working modes, with the default set to normal mode.

Remotely Shut Down: Once the device is powered on and functioning properly with the app, it can be shut down remotely via the app.

Troubleshooting

If the device cannot connect to the server when turned on for the first time, please check the following:

- 1. SIM Card Compatibility:** Ensure the SIM card inside the device supports 4G.
- 2. SIM Card Activation:** Verify that the SIM card is activated for data flow.
- 3. Server Parameters:** Check if the server parameters, including IP, APN, and the IMEI, are correct. It is crucial that the IMEI barcode on the device matches the IMEI entered during production. Ensure the device has a SIM card and the message is typed in the English input method.
- 4. Registration Issues:**
 - a. Device Number Issues:** If there is a message that the device number does not exist or is already registered, consult your distributor.
 - b. Account Issues:** If there is a prompt that the account has been registered, try registering again with a different account.

Specifications

Battery Capacity	700mAh 3.7V
Recharge Time	3H
Working Time	24H (Normal Usage), 48H (Standby Time)
Screen Size	2.8"
Network Band	B1, B2, B3, B5, B7, B8, B20, B28A (FDD), B8/5/2/1 (WCDMA), B8/5/3/2 (GSM)
RAM	128Mb
SIM Card	Nano SIM Card
Camera	0.3MP
Dimensions	12.78×54.59×97.59mm

Disposal

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.

Warranty

Products that you buy directly from our **Porodo** website or shop come with a 24-month warranty.

When you buy **Porodo** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at **porodo.net/warranty** and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check:

porodo.net/warranty

Contact Us

If you have any questions about this Privacy Policy, please contact us at:

info@porodo.net

Website: **porodo.net**

Service Support: **support@porodo.net**

Instagram: **[porodo](https://www.instagram.com/porodo)**