



**Green Lion**

## **PGX 1200Power Station**

SKU: GNPGX1200PSBK

Model No: PGX1200

## Table of Contents

Safety Introduction	2
Quick View	2
LCD Screen	4
Specifications	5
Packing List	6
Support Charging Device	6
Charging Method	6
Instructions	7
Disposal	8
Warranty	8
Contact Us	8

## Safety Instructions

Please read the user manual carefully when you use this product. You should follow all the instructions.

When children are using the product, please make sure they have close supervision to reduce the risks.

It will increase the risk of electric shock if you use non-recommended products or accessories.

Please make sure to use the product in a ventilated environment.

Please keep the product in a dry and ventilated place to avoid moisture and electric shock.

Please remove the power plug when the product is not in use.


Do not expose the product to fire or excessive temperatures. It will explode if the temperature is over 130°C.

Do not disassemble the product. It may cause fire, explosion, injury, and unpredictable risks.


Do not use the product with damaged wires or plugs, or damaged output cables. It may cause an electric shock.

## Quick View

### Top View:

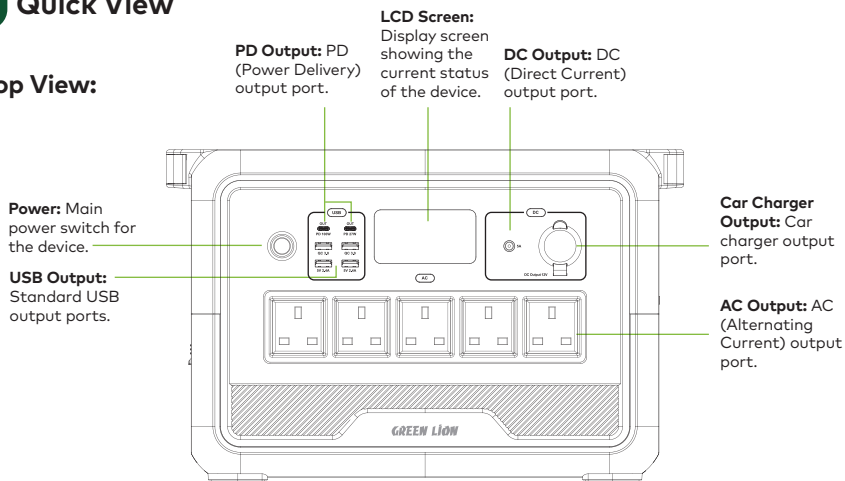


## Front View:

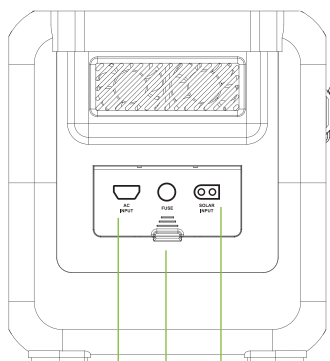



**AC Input:** Input port for AC power.

**Fuse:** Fuse for protection and circuit safety.

**Solar Input:** Input port for solar charging.

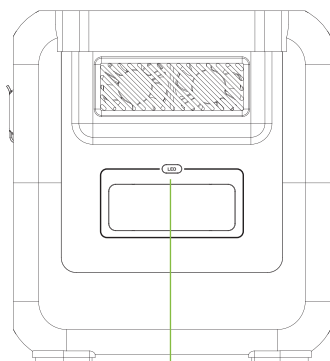

**LED Light:** Light indicator for the device.

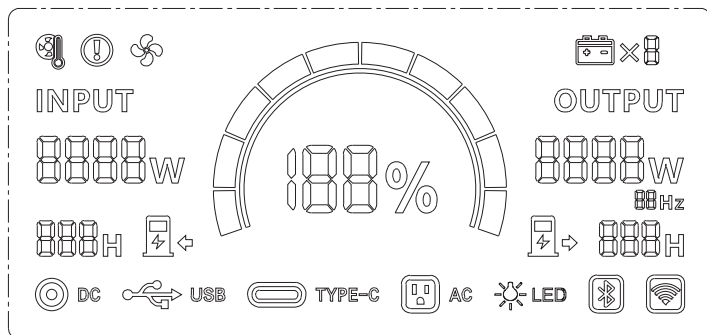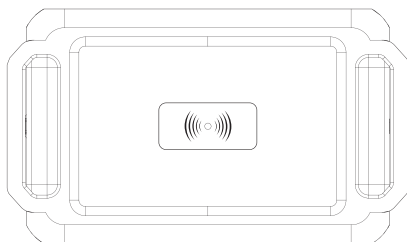

## LCD Screen




Press the button to turn it on, and press the button again to turn it off.



The current power of the product is displayed as a percentage (%).



The using time of current power: Indicates the duration of current power usage.  The current total output power: Displays the total output power being used.



Press USB button for USB port and wireless functions.



Press DC button for DC port function.



Press USB button and plug a Type-C cable for Type-C port



Press AC button for AC port function.



The fan is working if the temperature is over 40°C.



Overload warning: Indicates when the system is overloaded.  
Temperature warning of Inverter: Displays temperature range from 90°C to 95°C



Temperature warning of Inverter: Displays temperature range from 90°C to 95°C

### DC Input

Supports AC adapter charging.

Supports car charger charging.

### Anderson Input

Supports solar panel charging (12-75V).


**Button:** Press the button to turn on and press the button for 10 seconds to turn it off.

Let me know if you need any further adjustments!


## Specifications

Model Number	PGX1200
Material	ABS+PC+UL94 V0
Battery	LiFePO4
Capacity	1152Wh / 25.6V / 45000mAh
AC Wall Charging	1000W Max (<1.5 Hrs)
Solar Charging	XT60 PV 400W Max (5-3 Hrs)
5* AC Outputs	230V~50Hz 1200W Max
Car Jack Output	12V 10A (120W Max)
DC Output	12V 5A (60W Max)
USB-C1 Output	5V-9V-12V-15V/3A, 20V/5A (PD100W)
USB-C2 Output	5V/3A, 9V/3A, 12V/2.25A (PD27W)
USB-A1 Output	5V/2.4A, 9V/2A, 12V/1.5A (QC18W)
USB-A2 Output	5V/2.4A, 9V/2A, 12V/1.5A (QC18W)
USB-A3 Output	5V/2.4A (12W Max)
USB-A4 Output	5V/2.4A (12W Max)
Wireless Output	10W
Total Output	1577W Max
LED Light Wattage	5W
Lighting Modes	Low-High-SOS
Product Weight	11.39 kg
Product Dimensions	203*285*396 mm

## Packing List



1200W Power Station



Car Charger  
Cable



AC Charging  
Cable



User Manual

## Support Charging Device

**USB Port:** Smart phones, tablets, smart watches, digital cameras, e-readers, etc.

**12V Car Charger Port:** Car charger.

**DC Output:** Drones, routers, car refrigerators, etc. use 12V as the power supply device.

**AC Power:** Laptops, displays, appliances, etc.

## Charging Method

Before using or storing the product, please use the AC charging adapter. The LCD screen will display the current charge. When the LCD screen displays 100%, it means the battery is full. This charging process takes about 3 hours.



Car Charger: About 7-9 Hours



Solar Panels (Optional): About 3-8 Hours (Depending on Weather)

## Instructions

How to use this product:

1. Plug in your device and press the button that you are going to use.
2. When the port icon appears on the LCD screen, the output port will turn on to charge your device.
3. The continuous AC output port can only charge/power devices that operate at less than 1200 Watts. Once this limit is exceeded, the product will shut off automatically.
4. The AC port output will be turned off automatically after 45 minutes when being drawn under 2W power to save power.
5. The DC port or car charger port will be turned off automatically in 45 minutes when drawing under 2W power for power saving.
6. If the product is not used for a long time, it should be recharged every 3 months and kept at 60%-80% power. Please keep it in a cool and dry place.

### Note

Press the AC button to turn off the output and save power when the AC power port is not in use.





## Disposal

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.

## Warranty

This **Green Lion** product comes with a 12-month warranty when purchased from our website, official store, or approved sellers.

To extend the warranty, please visit **<https://www.greenlion.net/warranty>** and fill out the form with your product details. Make sure to upload a clear picture of the product.

After we review and approve your request, you will receive a confirmation email stating that your product's warranty has been extended.

For more info, please check:

**<https://www.greenlion.net/warranty>**

## Contact Us

If you have any questions about this Privacy Policy, please contact us at:

Website: **<https://www.greenlion.net/>**

Sales: **[sales@greenlion.net](mailto:sales@greenlion.net)**

Service Support: **[Support@greenlion.net](mailto:Support@greenlion.net)**

Telegram: **[@greenlion\\_global](https://t.me/greenlion_global)**

Instagram: **[@greenlion\\_global](https://www.instagram.com/greenlion_global)**