



Powerology

UNIVERSAL MULTI-PORT TRAVEL CHARGER

SKU: P45PDUTVBK

Table of Contents

Product Overview	2
Specifications	2
Schematic View	2
Instructions for Use	3
Device Compatibility	4
Adapter Plug Compatibility	5
Safety Precautions	8
Disposal	8
Warranty	9
Contact Us	9

Product Overview


The Powerology Universal Multi-Port Travel Charger is a versatile and reliable charging solution, designed for global compatibility, working in over 150 countries. It offers a 45W PD fast-charging capability and supports simultaneous charging of multiple devices. Featuring dual fuse safety, it includes a spare fuse for added protection. With built-in safeguards, it ensures safe charging, even when devices are at low battery levels, and it can charge devices from 0 % to 60 % in just 35 minutes. This compact, travel-friendly charger is an essential accessory for travelers seeking efficiency and convenience.

Specifications

Voltage	100–240V, 50/60Hz
Rated Working Current	8A
Rated Power	880W at 110V, 1840W at 230V
Total USB Output	45W
USB-C1 Output	5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/2.25A, 45W
USB-C2 Output	5V/3A, 15W
USB-A Output	5V/2.4A, 12W

Schematic View


1. Universal Socket
2. LED Indicator
3. Slider
4. USB-A Ports
5. PD

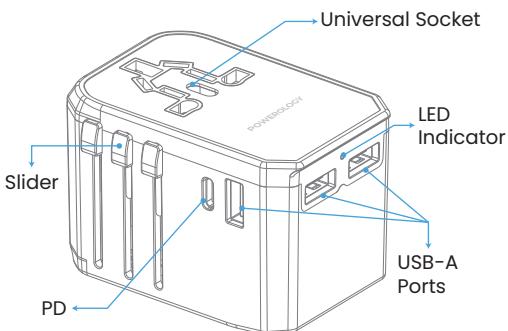

Instructions for Use

A. Fuse Replacement Instructions:


1. If an 8A overload occurs, the fuse will automatically cut off. Replace it with the provided spare fuse.
2. To access the replacement fuse, remove the small cover.
3. Extract the old fuse and install a new one, ensuring it's the correct 8A type.



B. Adapter Usage Instructions:


1. For the USA Plug: Fully extend the USA/AUS plug as indicated by Arrow B. Ensure the prongs are aligned parallel before pressing the square release button and retracting the plug after use.

Applicable in: The United States, Canada, Japan, and Taiwan (with two-pronged outlets).




2. For the AUS Plug: Extend the USA/AUS plug fully, rotate the prongs to the stated position as shown by Arrow B, press the square button, and retract the plug after use.

Applicable in: China (Mainland), Australia, and New Zealand (with slanted or octagonal prong outlets).




3. For the UK Plug: Slide out the UK plug completely as indicated by Arrow B, press the square button to lock, and slide back to retract after use.

Applicable in: The United Kingdom, Hong Kong, Malaysia, and Singapore (three-pin outlets).



4. For the EU Plug: Extend the EU plug as shown by Arrow B, press the square button to secure, and retract after use.

Applicable in: Germany, France, the Netherlands, and Belgium (round pin outlets).



Device Compatibility

This product is designed for a broad range of electronic devices with a maximum capacity of 1840W at 230V and 880W at 110V. It is compatible with devices such as cameras, iPads, iPhones, MacBooks, Android smartphones, power banks, headsets, gaming consoles, shavers, GPS devices, etc. Always refer to your device's safety data sheet or nameplate for compatibility before use.




Australia
China




USA



UK



Europe



Adapter Plug Compatibility

American Samoa	Japan	Vietnam
Anguilla	Jamaica	Virgin Islands (US & British)
Antilles	Laos	Yemen
Aruba	Lebanon	AUS Plug:
Bahamas	Liberia	American Samoa
Bangladesh	Maldives	Argentina
Barbados	Mexico	Australia
Bermuda	Micronesia	China
Bolivia	Montserrat	El Salvador
Brazil	Netherlands	Fiji
Cambodia	Nicaragua	Guatemala
Canada	Niger	Kiribati
Cayman Islands	Okinawa	Nauru
China	Panama	New Zealand
Colombia	Peru	Panama
Costa Rica	Philippines	Papua New Guinea
Cuba	Puerto Rico	St. Vincent
Ecuador	St. Vincent	Tajikistan
El Salvador	Saudi Arabia	Tonga
Guam	Tahiti	Uruguay
Guatemala	Taiwan	UK Plug:
Guyana	Thailand	Bahrain
Haiti	United States	Bangladesh
Honduras	Venezuela	Belize

Botswana	Myanmar	Belgium
Brunei	Nigeria	Bolivia
Cameroon	Oman	Bosnia
Channel Islands	Qatar	Brazil
Cyprus	St. Lucia	Bulgaria
Dominica	St. Vincent	Burkina Faso
El Salvador	Saudi Arabia	Burundi
Gambia	Seychelles	Cameroon
Ghana	Sierra Leone	Canary Islands
Gibraltar	Singapore	Cape Verde
Grenada	Tanzania	Central African Republic
Guatemala	Uganda	Channel Islands
Guyana	United Kingdom	Chile
Hong Kong	Vietnam	Comoros
Iraq	Yemen	Congo
Ireland	Zambia	Croatia
Isle of Man	Zimbabwe	Cote d' Ivoire
Jordan	EU PLUG:	Cyprus
Kuwait	Albania	Denmark
Lebanon	Algeria	Djibouti
Macau	Angola	Egypt
Malawi	Argentina	El Salvador
Malaysia	Austria	Equatorial Guinea
Maldives	Azores	Eritrea
Malta	Balearic Islands	Faeroe Islands
Mauritius	Bangladesh	Finland

France	Madeira	Sudan
Gabon	Mali	Suriname
Germany	Martinique	Sweden
Gibraltar	Mauritania	Switzerland
Greece	Mauritius	Syria
Greenland	Monaco	Thailand
Guadeloupe	Morocco	Togo
Guinea	Mozambique	Tunisia
Guinea-Bissau	Myanmar	Turkey
Hungary	Nepal	Uruguay
Iceland	Netherlands	Vietnam
India	Niger	Zambia
Indonesia	Norway	
Iran	Oman	
Iraq	Pakistan	
Israel	Paraguay	
Italy	Peru	
Kazakhstan	Philippines	
Korea	Poland	
Kuwait	Portugal	
Laos	Romania	
Lebanon	Russia	
Lithuania	Rwanda	
Luxembourg	Senegal	
Macedonia	Somalia	
Madagascar	Spain	

Safety Precautions

1. The maximum power output of the charger is 45 W via the USB-C port and 12 W via the USB-A port when used independently. When both ports are in use simultaneously, the USB-C output is limited to 30 W.
2. This adapter plug is designed solely for socket compatibility and does not convert electrical voltage. Ensure that the operating voltage of your device matches the local power supply before use.
3. Always disconnect the adapter from the wall outlet when it is not in use.
4. Do not operate the adapter if it shows any signs of damage or malfunction.
5. Keep the adapter dry and avoid using it in environments with moisture, condensation, or high humidity.
6. Handle the adapter only with dry hands to reduce the risk of electric shock.
7. This adapter is not suitable for use with high-power appliances exceeding 230 V at 1,840 W or 110 V at 880 W.
8. Keep the device out of reach of children to prevent accidental injury or misuse.
9. This product is intended for indoor use only.

Disposal

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.

Warranty

Products that you buy directly from our **Powerology** website or shop come with a 24-month warranty.

The 24-month warranty applies to products purchased directly from our **Powerology** website or store. If **Powerology** products are bought from any of our verified retailers, then the product is eligible for only a 12-month warranty. To extend your product's warranty, visit our website <https://www.powerology.me/warranty> and fill in your details in the provided form along with an uploaded picture of the product to process your request. Once approved, you will receive a confirmation email of the extended product warranty. Upload the required information within 48 hours of purchase to be eligible for a 24-month warranty period.

For more info, please check:

<https://www.powerology.me/warranty>

Contact Us

If you have any questions about this Privacy Policy, please contact us at: hey@powerology.me

Website: <https://www.powerology.me/>

Instagram: [powerology_official](#)

Facebook: [powerology.ME](#)