



**Powerology**

**UNIVERSAL MULTI-PORT  
TRAVEL ADAPTER**

SKU: P65W4PD

# **Table of Contents**

<b>Product Overview</b>	<b>2</b>
<b>Specifications</b>	<b>2</b>
<b>Product Sections</b>	<b>3</b>
<b>Applicable Outlets</b>	<b>3</b>
<b>Pole Unearthed Devices</b>	<b>4</b>
<b>setup Guide</b>	<b>5</b>
<b>Fuse Replacement Instructions</b>	<b>7</b>
<b>Safety Precautions</b>	<b>8</b>
<b>Compatible Countries</b>	<b>9</b>
<b>Disposal</b>	<b>11</b>
<b>Warranty</b>	<b>12</b>
<b>Contact Us</b>	<b>12</b>

## Product Overview

The Powerology Universal Multi-Port Travel Adapter is a compact and versatile charging solution designed for global travelers. It features four Type-C ports and one USB-A port, offering a total output of 65W to charge multiple devices simultaneously. This adapter is compatible with outlets in over 150 countries and includes a universal plug design, making it ideal for laptops, smartphones, and other electronic devices. The product is equipped with a dual fuse for added safety and has active protection to safeguard both the adapter and connected devices. It offers quick charging, with a full charge from 0 % to 60 % in about 35 minutes.

## Specifications

Model	P65W4PD
AC Input	100V-250V, 50/60Hz
Total DC Output	65W
Operating Temperature	0°C - 25°C0
USB-A Output	12W 5V/2.4A
USB-C Output	65W 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A
Output 2 USB-C	15W 5V/3A
Output 3 USB-C	15W 5V/3A
Output 4 USB-C	15W 5V/3A
Combined Output Mode USB-C PD Output	45W 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/2.25A
Output 4/3/2 USB-C	15W 5V/3A
USB-A Output	12W 5V/2.4A
Dimensions	71 x 54 x 53mm

# Product Sections

- 1. Multi-socket
- 2. US/AU/UK/EU Plugs
- 3. LED Indicator


LED solid: normal operation

LED does not light:

Possible overload, unplug one device and check status indicator again.


Fuse burn-out, please check the fuse.

- 4. USB-A1 Ports
- 5. USB-C2/C3/C4 Ports
- 6. USB-C1 Port

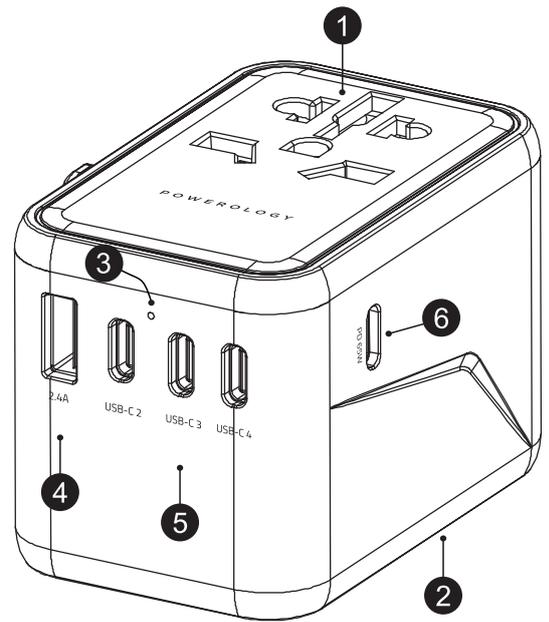


# Applicable Outlets

1. Adapter can accept Type A, B, C, E, F, G, I, J, L, N plugs.

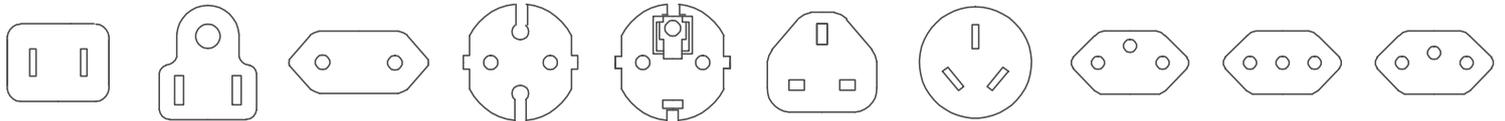

Type A   Type B   Type C   Type E   Type F   Type G   Type I   Type J   Type L   Type N

Please notice that type D, H, K, M, and O plugs are not accepted.

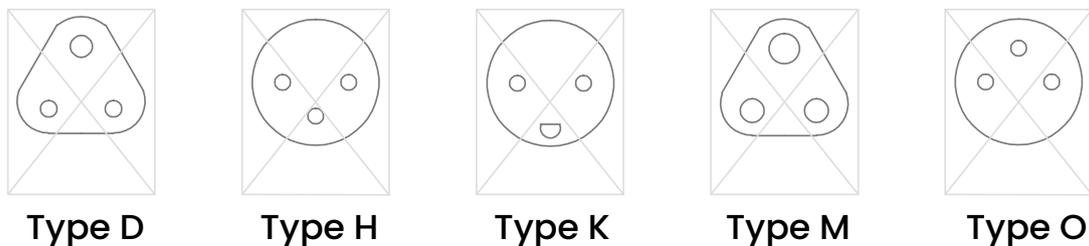

Type D


Type H

Type K

Type M

Type O

2. Adapter can plug into Type A, B, C, D, E, F, G, H, I, J, K, L, M, N, and O outlets.

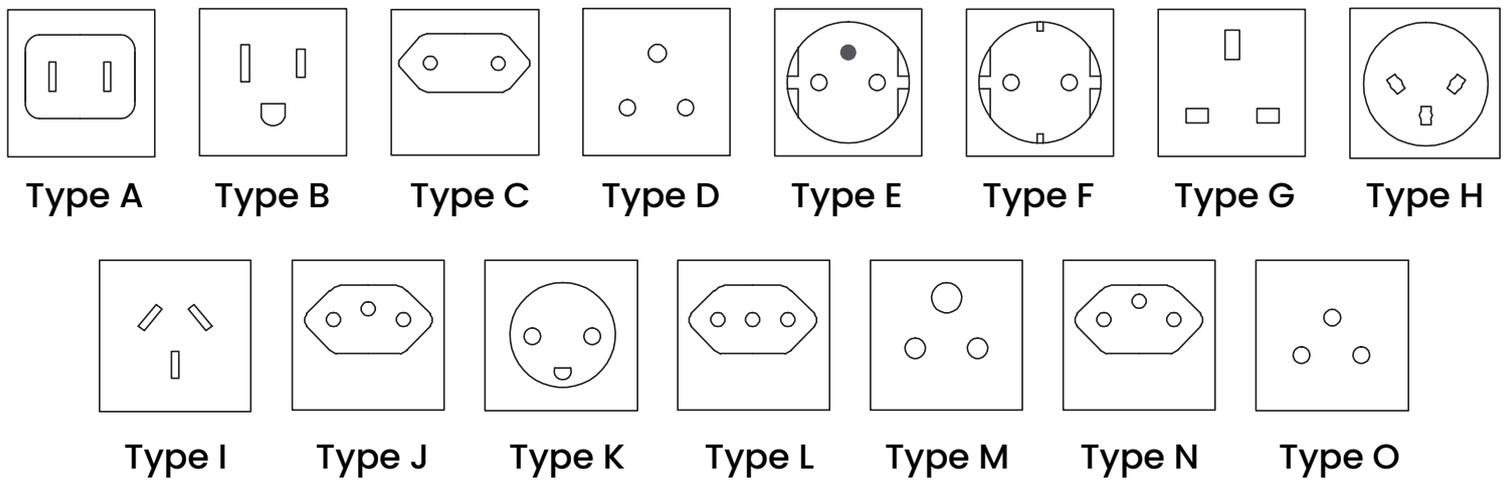

## Pole Unearthed Devices

This product is compatible with most electronic devices up to 2500W at 250V and 1000W at 100V. It can be used with a variety of appliances, including:

1. Laptops
2. Small Travel Hair Dryers
3. Travel Irons
4. Electric Fans
5. Table Lamps
6. Electric Razors

Please verify the device's safety data sheet or data plate for more details before plugging it in.

### USB Devices

This product is also suitable for devices such as:

7. Cameras
8. Smartphones
9. Tablets
10. Portable Game Consoles
11. Bluetooth Speakers
12. Power Banks





7



8



9



10



11



12

## setup Guide

### Features:

Built-in multi-country plugs can be selected to fit outlets in various countries.

The safety function switch ensures that only one plug is energized at a time.

### Important Notes:

Ensure that the button is reset by pressing it fully down. If the button is not pressed down, the plug will not be in place and the normal use will not occur.

Only one plug type can be used at a time. Slide the knob to select the desired plug type. Other plugs are locked automatically.


### 1. Use USA Plug

Press the button and slide it down to select the USA plug.

Ensure the contact blades are aligned in the parallel position.

### To Remove:

Press and hold the "USA" button to release the plug, then continue pulling until the plug is fully out. Once removed, the button will reset automatically.

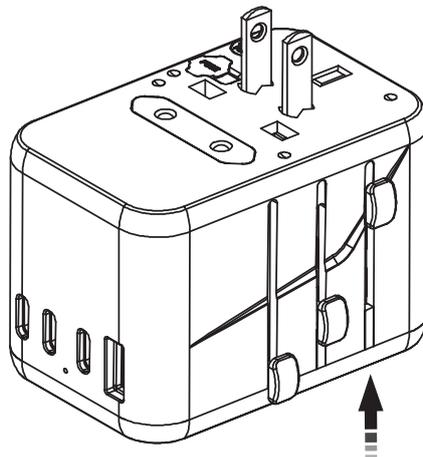


## 2. Use AUS Plug

Press the button and slide it down to select the AUS plug.

Ensure the contact blades are aligned in the parallel position.

To Remove:

Press and hold the "AUS" button to release the plug, then continue pulling until it is fully removed. Once removed, the button will reset automatically.

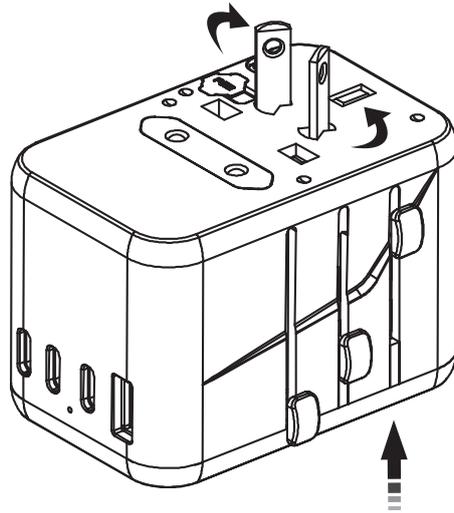


## 3. Use UK Plug

Press the button and slide it down to select the UK plug.

Ensure the contact blades are aligned in the parallel position.

To Remove:

Press and hold the "UK" button to release the plug, then continue pulling until it is fully removed. Once removed, the button will reset automatically.

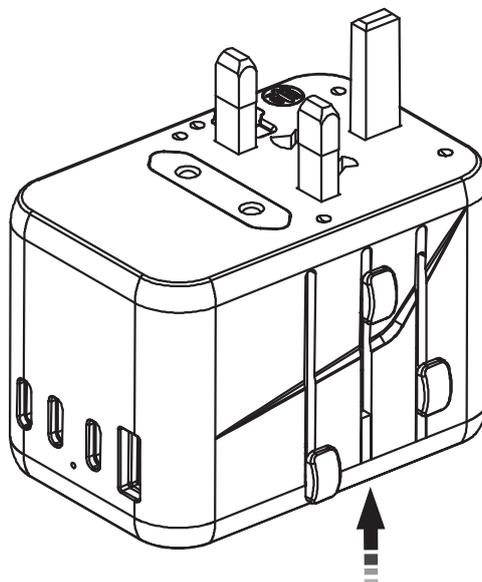


#### 4. Use EU Plug

Press the button and slide it down to select the EU plug.

Ensure the contact blades are aligned in the parallel position.

To Remove:

Press and hold the "EU" button to release the plug, then continue pulling until it is fully removed. Once removed, the button will reset automatically.

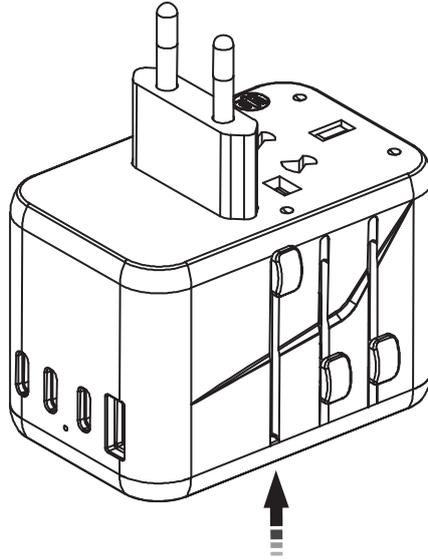


## Fuse Replacement Instructions

Remove the old fuse (1).

Insert the new fuse (2) in the original position of (1) to restore the adapter's functionality.

Alternatively, you can replace the fuse with a new one. Fuse Specifications: 250V, 10A, 6.3 x 25.4mm.

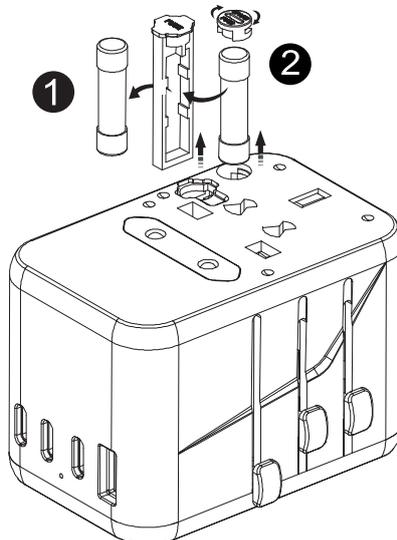

## Notes:

Ensure that the device is powered off before replacing the fuse. Check for any water leakage from the device, especially around the access equipment and power connections.

Confirm that the product is not wet and that no water has leaked out.

## Safety Precautions

Always disconnect the adapter from the outlet when not in use. Read these instructions carefully before use. This product does not convert voltage (AC-AC). To avoid damage or other safety hazards, ensure the power outlet provides the correct voltage for your device.

For indoor use only.

Misuse can result in electric shock.

The USB cable should be no longer than 3 meters.

The adapter is for temporary use only. Do not use it permanently.

Do not insert an adapter into another adapter unless specifically authorized by the manufacturer.

This product is intended for use with unearthed or double-insulated appliances only. It has no grounding.



## Compatible Countries

EU PLUG

Albania

Algeria

Angola

Argentina

Austria

Azores

Balearic Islands

Bangladesh

Belgium

Bolivia

Bosnia

Brazil

Bulgaria

Burkina Faso

Burundi

Cameroon

Canary Island

Cape Verde

Central African Republic

Channel Islands

Chile

Comoros

Congo

Croatia

Cote d'Ivoire

Cyprus

Denmark

Djibouti

Egypt

Egypt

El Salvador

Equatorial Guinea

Eritrea

Faroe Islands

Finland

France

Gabon

Germany

Gibraltar

Greece

Greenland

Guadeloupe

Guinea

Guinea-Bissau

Hungary

Iceland

India

Indonesia

Iran

Iraq

Israel

Italy

Kazakhstan

Korea

Kuwait

Laos

Lebanon

Lithuania

Luxembourg

Macedonia

Madagascar

Madeira

Mali

Martinique

Mauritania

Mauritius

Monaco

Morocco

Mozambique

Myanmar

Nepal

Netherlands

Niger

Norway

Pakistan

Paraguay

Peru

Philippines

Poland

Portugal

Romania

Russia

Rwanda

Senegal

Somalia

Spain

Sudan

Suriname

Sweden

Switzerland	Barbados	Colombia
Syria	Bermuda	Costa Rica
Thailand	Bolivia	Cuba
Togo	Brazil	Ecuador
Tunisia	Cambodia	El Salvador
Turkey	Canada	Guam
Uruguay	Cayman Islands	Guatemala
Vietnam	China	Guyana
Zambia	Colombia	Haiti
AUS PLUG	Costa Rica	Honduras
American Samoa	Cuba	Japan
Argentina	Ecuador	Jamaica
Australia	El Salvador	Laos
China	Guam	Lebanon
El Salvador	Guatemala	Liberia
Fiji	Guyana	Maldives
Guatemala	Haiti	Mexico
Kiribati	Honduras	Micronesia
Nauru	USA PLUG	Montserrat
New Zealand	American Samoa	Netherlands
Panama	Anguilla	Nicaragua
Papua New Guinea	Antilles	Niger
St. Vincent	Aruba	Okinawa
Tajikistan	Bahamas	Panama
Tonga	Bangladesh	Peru
Uruguay	Barbados	Philippines
USA PLUG	Bermuda	Puerto Rico
American Samoa	Bolivia	Sao Tome
Anguilla	Brazil	St. Vincent
Antilles	Cambodia	Saudi Arabia
Aruba	Canada	Tahiti
Bahamas	Cayman Islands	Taiwan
Bangladesh	China	Thailand

United States  
Venezuela  
Vermont  
Virgin Islands (US & British)  
Yemen  
Bahrain  
Bangladesh  
Belize  
Botswana  
Brunei  
Cameroon  
Channel Islands  
Cyprus  
Dominica  
El Salvador  
Gambia  
Ghana  
Gibraltar  
Grenada  
Guatemala  
Guyana  
Hong Kong  
Iraq  
Ireland  
Isle of Man  
Jordan

Kuwait  
Lebanon  
Macau  
Malawi  
Malaysia  
Maldives  
Malta  
Mauritius  
Myanmar  
Nigeria  
Oman  
Qatar  
St. Lucia  
St. Vincent  
Saudi Arabia  
Seychelles  
Sierra Leone  
Singapore  
Tanzania  
Uganda  
United Arab Emirates  
United Kingdom  
Vietnam  
Zambia  
Zimbabwe

## **Disposal**

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.

## **Warranty**

Products that you buy directly from our **Powerology** website or shop come with a 24-month warranty.

The 24-month warranty applies to products purchased directly from our **Powerology** website or store. If **Powerology** products are bought from any of our verified retailers, then the product is eligible for only a 12-month warranty. To extend your product's warranty, visit our website [powerology.me/warranty](https://powerology.me/warranty) and fill in your details in the provided form along with an uploaded picture of the product to process your request. Once approved, you will receive a confirmation email of the extended product warranty. Upload the required information within 48 hours of purchase to be eligible for a 24-month warranty period.

For more info, please check:  
[powerology.me/warranty](https://powerology.me/warranty)

## **Contact Us**

If you have any questions about this Privacy Policy, please contact us at: [hey@powerology.me](mailto:hey@powerology.me)

Website: [powerology.me](https://powerology.me)

Instagram: [powerology\\_official](https://www.instagram.com/powerology_official)

Facebook: [powerology.ME](https://www.facebook.com/powerology.ME)