



**Green Lion**

## **Valmont 20000mAh Power Bank**

SKU: GNVLM20KPBBK

Model No: GL-PX46

## Table of Contents

|                    |   |
|--------------------|---|
| Feature            | 2 |
| Product Overview   | 2 |
| Specifications     | 3 |
| Display Guide      | 3 |
| Usage Instructions | 4 |
| Precautions        | 5 |
| Disposal           | 7 |
| Warranty           | 7 |
| Contact Us         | 7 |

## Feature

The power bank has a 20000mAh battery capacity.

It supports 65W fast charging for the power bank itself.

The USB-C port provides a 100W output.

The power bank supports simultaneous output from multiple ports.

It offers protection against overcharge, over-discharge, over-voltage, short-circuiting, and EMI.

The power bank features a PU adhesive film machine shell.


## Product Overview



## Specifications

|                    |   |
|--------------------|---|
| Model No.          | GL-PX46   |
| Material           | ABS+PC+PU Leather                               |
| Battery            | 20000mAh  |
| USB-C1/C2 Input    | 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A (PD65W) |
| USB-C1/C2 Output   | 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A (PD100W)   |
| USB-A Output       | 5V/3A, 9V/2A, 12V/1.5A (QC18W)                  |
| USB-C1+C2          | 65W+35W   |
| USB-C1+USB-A       | 65W+18W   |
| USB-C2+USB-A       | 15W   |
| USB-C1+C2+USB-A    | 65W+15W(C1+C2+A)                                |
| Product Weight     | 390 g   |
| Product Dimensions | 140*82.5*28 mm                                  |

## Display Guide

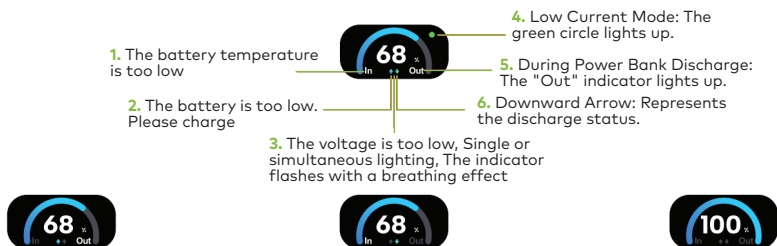

## Connection Status:



## Usage Instruction


Use the Power Bank to charge smart phone or digital products. (DC 5V/9V/12V/20V)

### Charge the Power Bank

Select a USB charging cable, and connect the USB-C connector to the input port of the power bank. The TFT display on the power bank will show the remaining battery level, with the 'In' indicator lit up and the upward arrow symbol illuminated, indicating that the power bank is in charging mode. When fully charged, the TFT display will show a full battery status.

### Charging Smartphones or Digital Electronics with the Power Bank

Select a USB charging cable and connect it to your phone or other digital device to begin automatic charging. During charging, the TFT display will show the remaining battery level. The 'OUT' indicator and downward arrow symbol will light up, indicating the power bank is in discharging mode. Press the button to switch the TFT display interface, showing the corresponding power output for different charging ports.

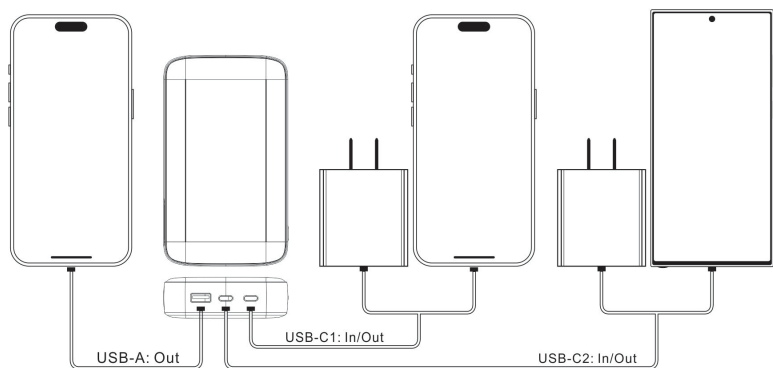

## Precautions

1. Before using the product, please charge it first.
2. Do not place or use the product at high temperature or in humid environment. Do not expose it to the sunlight.
3. It is forbidden to throw the product in fire or water so as to avoid fire and explosion.
4. Please keep the product out of the reach of children.
5. Do not disassemble the device arbitrarily, as no removable/maintainable parts are installed in the product.
6. Do not vigorously shake, hit, or impact the product.
7. If the product has exposed liquid, heave or other abnormalities, please do not continue to use, and contact customer service center.
8. If the product has liquid leakage and splashes into the eyes, do not knead youreyes, wash with clean water immediately, and go to the hospital for medical treatment.
9. It is normal that the temperature of the product rises during working; please take out of the product during or after use.
10. Do not cover or block the product with paper or other objects, toavoidblocking the heat dissipation and cold cutting.

11. Do not use the product if nobody watches it in the car or somewhere.
12. Before using the product, please check its voltage demand so as to prevent it being damaged by wrong voltage or watt.
13. If the mobile power supply is not used for long time, please charge/discharge it once every three months to ensure the service life of the product.
14. When using the product and after complete discharging, please fully charge the product to supply the power for digital product at any time.



## Disposal

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.

## Warranty

Products that you buy directly from our **Green Lion** website or shop come with a 24-month warranty.

When you buy **Green Lion** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at <https://www.greenlion.net/warranty> and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check:  
<https://www.greenlion.net/warranty>

## Contact Us

If you have any questions about this Privacy Policy, please contact us at:

Website: <https://www.greenlion.net/>

Sales: [sales@greenlion.net](mailto:sales@greenlion.net)

Service Support: [Support@greenlion.net](mailto:Support@greenlion.net)

Telegram: [@greenlion\\_global](https://t.me/greenlion_global)

Instagram: [@greenlion\\_global](https://www.instagram.com/greenlion_global)