

PORODO



Porodo

**Lavalier Microphones with
Type-C Connector and
Lightning Adapter**


SKU: PD-LDMCLA

Table of Contents


Overview	2
Specifications	2
Schematic View	3
Instructions for Use	3
Indicator Guide	5
OTG Functionality	6
Package Contents	6
Warranty	7
Contact Us	7

Overview


Thank You for Choosing Our Product. This product is an advanced wireless microphone that delivers professional-quality audio. It is designed for ease of use with its plug-and-play functionality and does not require a separate application. This versatile tool is ideal for a variety of uses including online live streaming, video vlogging, conducting interviews, recording interviews, video teaching, and more. The product is composed of three main components: a charging compartment, microphone transmitters, and a receiver.

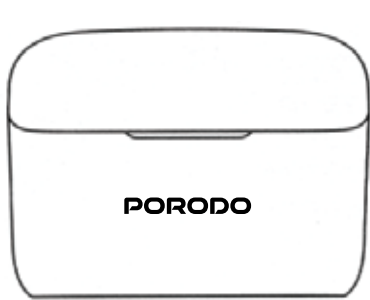

Charging case

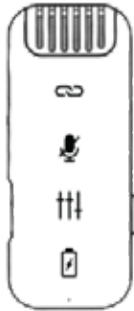

Microphone

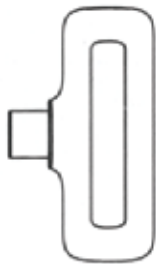


Receiver

Specifications

[A] Microphones	
Latency	20ms
Frequency	2.4GHz
Frequency Response	20HZ-20KHZ
Sensitivity	-30dB
SNR	-60dB
Battery Capacity	60mAh
Working Time	4H
Recharge Time	1 H
[B] Receiver	
Latency	< 20ms
Frequency	2.4GHz
Frequency Response	20HZ-20KHZ
[C] Charging Case	
Battery Capacity	300mAh
Charging Time	2 Times (Up to 8H)
Recharge Time	2 H

Schematic View

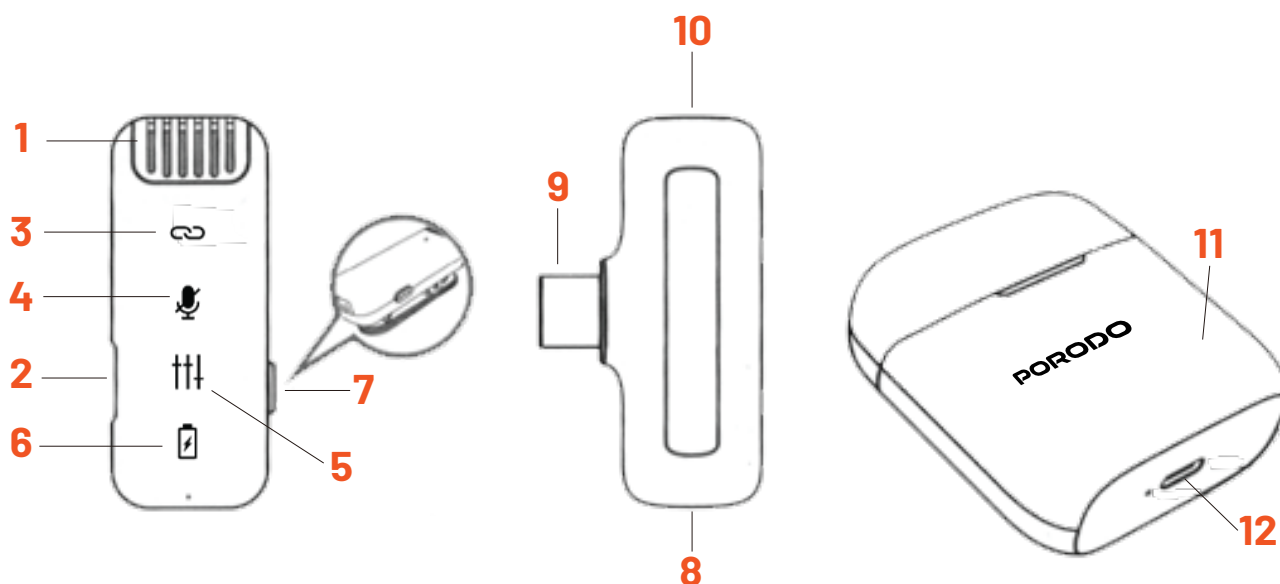


- 1. Microphone
- 2. Microphone Charging Port
- 3. Connection Indicator Light
- 4. Mute Indicator Light
- 5. Reverberation Indicator Light
- 6. Charging Indicator Light

- 7. Mic Function On/Off Key
- 8. Receiver Recoil Port
- 9. Connection Port
- 10. Connection Indicator Light
- 11. Power Display
- 12. Charging Port


Instructions for Use

Step 1: Insert the receiver's mobile phone connection port into the phone. The indicator light will turn on to confirm a successful connection.

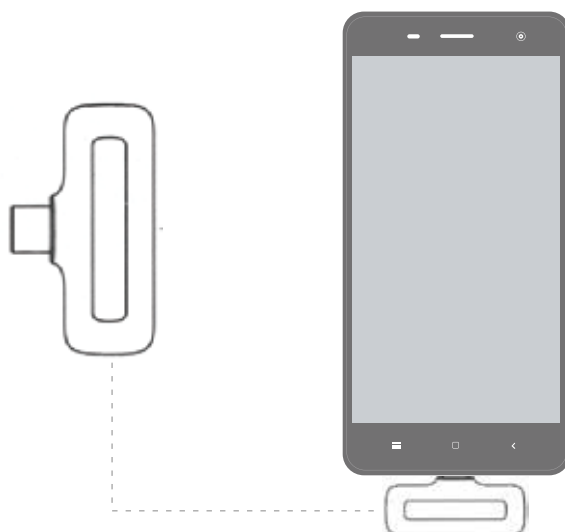


Note: For Oppo, Vivo, IQOO, and Realme brand mobile phones, functionality is possible only after adjusting settings. Navigate to the phone settings and search for "OTG" to enable the OTG power supply.

Step 2: Press and hold the microphone's power button. The indicator light will turn on, indicating that the device has powered on successfully.

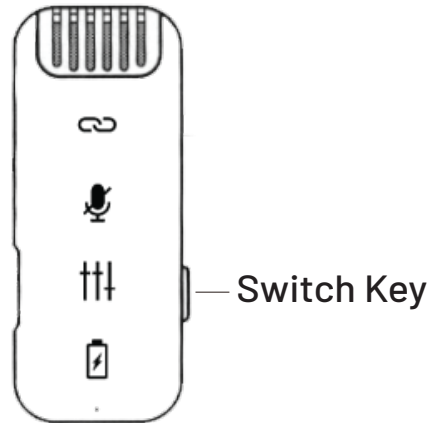


Step 3: Ensure that the indicator light on the receiver is constantly on, along with the microphone connection indicator light, signaling a successful connection. Now open the camera, live video, and other relevant apps on your phone to utilize the microphone for audio reception.

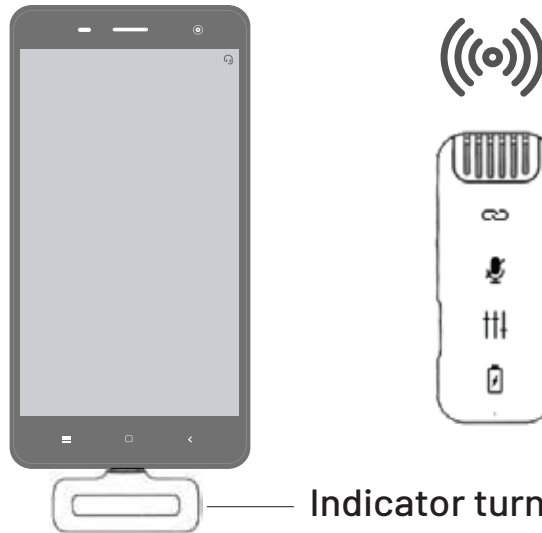

Special Note:

For the use of the receiver's port (8), note that there is no internal battery, and thus no need to recharge the receiver during live usage. If your phone's battery runs low while live streaming, it can be directly recharged through the port (8).

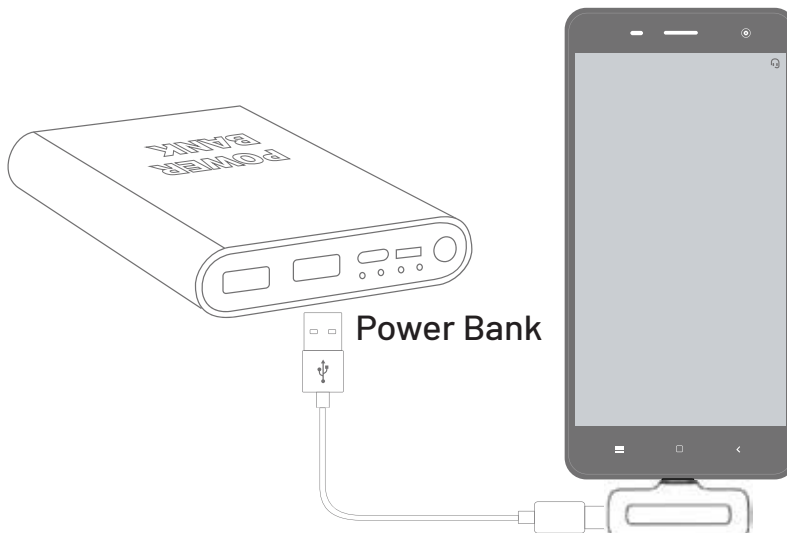

Indicator Guide

Microphone

Function/Status	Operate	Indicator status
Power On	Long press the button	Indicator light on
Power Off	Long press the button	Indicator light off
Pairing	—	Connection indicator flashing
Paired Successfully	—	Solid connection indicator light
Mute On/Off	Double-press the button	When the indicator light is on the function is enabled. If the indicator light is off, the function is deactivated.
Reverb On/Off	Press the button three times	When the indicator light is on the function is enabled. If the indicator light is off, the function is deactivated.
Noise Reduction Switching	Press the button	Turning Off Noise Reduction: When the green light flashes slowly once, the connection indicator remains green, indicating that noise reduction is deactivated. 1. The connection light flashes green once and stays on, signaling that Level 1 noise reduction is active. 2. After the green light flashes twice, it remains on, indicating that Level 2 noise reduction is active. 3. The connection light flashes green quickly three times and stays on continuously, indicating that Level 3 noise reduction is active.
Charging	—	The charging indicator light stays on during the charging process and turns off when the battery is fully charged.

Receiver

Function/Status	Operate	Indicator status
Power On	Insert the device to power on.	Indicator light is on.
Power Off	Unplug the device to power off.	Indicator light is off.
Pairing	–	Indicator light is flashing.
Paired Successfully	–	Solid indicator light.

OTG Functionality

iPhone and Huawei: These devices support plug-and-play functionality.

VIVO/OPPO and Other Mobile Phones: Manually enable the OTG function.

VIVO Phones: Go to Settings > More Settings > Find OTG > Toggle the switch to enable.

OPPO Phones: Go to Settings > Additional Settings > Find OTG > Toggle the switch to enable.

Other Phones: Go to Settings > Network & Internet > Find OTG > Toggle the switch to enable.

Note: If the OTG function is not used for 10-5 minutes, the phone will automatically shut down to conserve battery. There is no need to unplug the receiver after recording to playback the video.

Package Contents

1. Microphone Transmitter
2. Receiver
3. Charging Case
4. Charging Cable

Warranty

Products that you buy directly from our **Porodo** website or shop come with a 24-month warranty.

When you buy **Porodo** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at **porodo.net/warranty** and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check:
porodo.net/warranty

Contact Us

If you have any questions about this Privacy Policy, please contact us at:
info@porodo.net

Website: **porodo.net**

Service Support: **support@porodo.net**

Instagram: **porodo**