

PORODO



Porodo


**Lavalier Microphones
with Type-C Connector
and Lightning Adapter**

SKU: PD-WCDMIC-BK

Table of Contents

Schematic View	2
Specifications	2
Instructions for Use	3
[A] Power On/Off	3
[B] Initial Use and Pairing Guide	3
[C] When Connected	3
Mute Function	4
Noise Cancellation	4
Turning Off the Microphone	4
Charging Instructions	5
Indicator Guide	5
Package Contents	6
Troubleshooting	6
Warranty	7
Contact Us	7

Schematic View

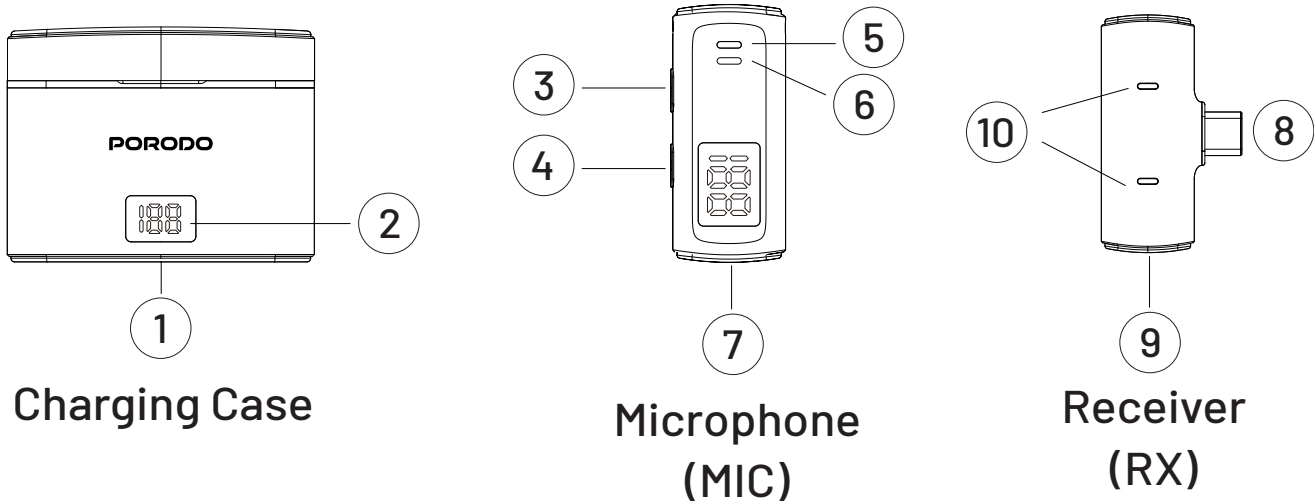

1. Type-C Charging port
2. Charging Case Power Display
3. Mic On/Off Button
4. Mic M Button (Mute/Noise Cancellation)
5. Mic Connection/Noise Cancellation Indicator
6. Mute Indicator

7. Mic Charging Port
8. RX Type-C/lightning port
9. RX Type-C/lightning charging port
10. RX indicators


Specifications

[A] Microphones	
Latency	20ms
Frequency	2.4GHz
Frequency Response Range	50HZ-18KHZ
Sensitivity	-38±2dB
SNR	68dB
Battery Capacity	90mAh
Working Time	7H
Recharge Time	1.5H
[B] Receiver	
Latency	20ms
Frequency Range	2.4GHz
Frequency Response	50HZ-18KHZ
[C] Charging Case	
Battery Capacity	600mAh
Charging Time	2 Times (Up to 16H)
Recharge Time	1.5H


Instructions for Use

[A] Power On/Off

Step 1: Press and hold the On/Off button on the microphone for 3 seconds. The indicators will turn green and red.

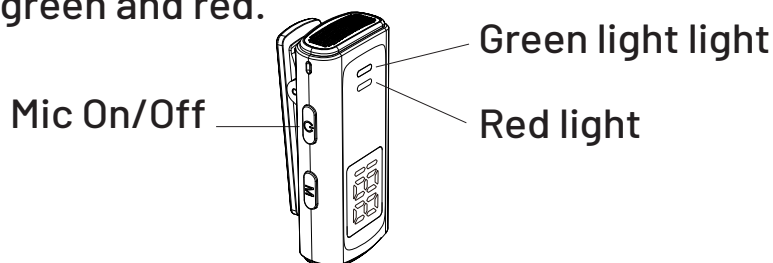

Step 2: Connect the receiver (RX) to your phone. Once connected, the RX indicator should turn green.

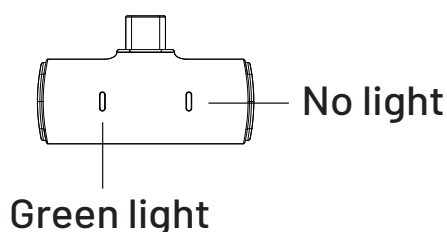


If the RX indicator does not light up green, please:

- a.** Ensure your phone's OTG setting is enabled. You may need to search for "OTG" in your phone settings to turn on the OTG power supply.
- b.** Remove any case from your phone. After removing the case, reconnect the RX to your phone.

[B] Initial Use and Pairing Guide

- 1.** Upon first use, both the microphone (MIC) and receiver (RX) will automatically enter pairing mode.
- 2.** During this mode, the indicators on the MIC and RX will flash alternately in green and red.
- 3.** Once the MIC and RX are successfully paired, the indicators will remain solid green and cease to blink.

[C] When Connected

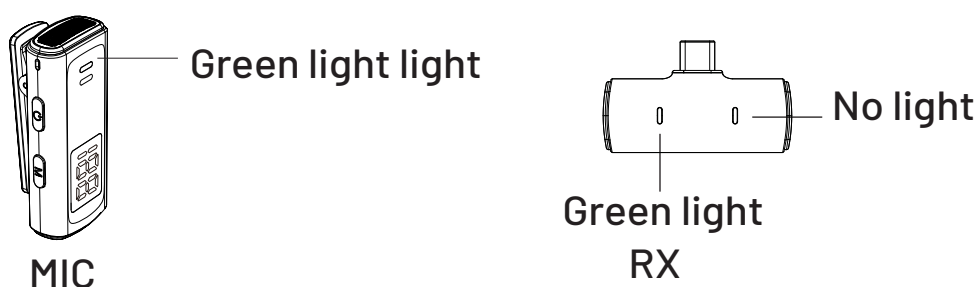


After the microphone (MIC) and receiver (RX) are connected, the MIC is ready for use. Launch any recording or live video app to capture audio.

Note: Some phones may not support using an external microphone with the built-in camera app. If your recordings have no sound, consider downloading alternative camera apps, such as OpenCamera, to ensure audio capture.


Mute Function

To mute the microphone, double-click the 'M' button. The indicator light will turn red to signify that the microphone is in mute mode. Double-click the button again to deactivate mute and resume normal operation.

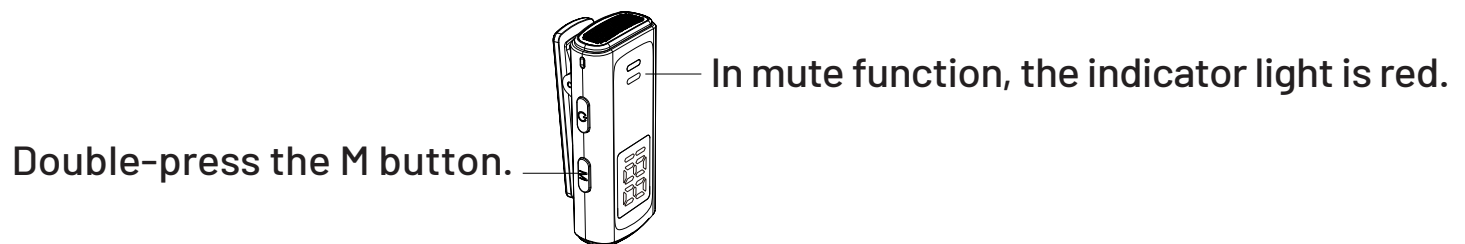

Noise Cancellation

1. When the microphone (MIC) is connected to the receiver (RX), noise cancellation is automatically enabled.
2. To toggle noise cancellation, press the 'M' button once to turn it off and press again to turn it back on.
3. When noise cancellation is active, the indicator turns on with solid green light. When it is turned off, the indicator flashes with green light.

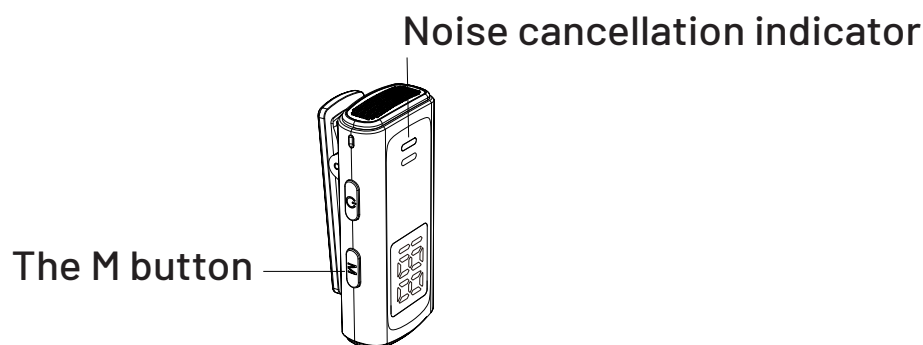

Turning Off the Microphone

Press and hold the On/Off button on the microphone for three seconds to power it off.


Charging Instructions

1. Charging the Microphone

To charge the microphone (MIC) when the charging case is powered, place the MIC inside the casing which will start the charging. Please ensure to remove any stickers from the MIC before charging.

2. Charging the Case

Connect the charging case to power source using a charging cable. The case's indicator lights will blink to display the current battery level.







3. Charging your Phone

You can charge your phone through the receiver's (RX) port. Use a Type-C cable for phones with a Type-C port and a Lightning cable for phones with a Lightning port.

Indicator Guide

MIC

Function	Instruction	Light Status
Power On	Press and hold the  button for 3 seconds to activate or deactivate the device.	Red and green flashing light
Power Off	Press and hold the  button for 3 seconds to reset the device.	Light is off.
Pairing	–	Red and green flashing light
Paired	–	Solid green light
Noise Cancellation	Press the  button once to select or confirm an option.	On: Solid green light Off: Flashing green light
Mute	Press the  button twice to toggle or cycle through settings.	Solid red light
Low Battery	–	Flashing red light
Charging	To charge with the charging case, place the device in the charging case to recharge.	–

Receiver

Function	Instruction	Light Status
Power On	Device is turned on.	Red and green flashing light
Power Off	Device is turned off.	Light is off.
Pairing	–	Red and green flashing light
Paired	–	Solid green light

Package Contents

1. Microphone
2. Receiver
3. Charging Case
4. Type-C Charging Cable

Troubleshooting

1. No Sound from Microphone

Please verify the status of the MIC and RX indicators.

a. Both indicators are turned on with solid green light.

Samsung Phones: Use alternative apps instead of the built-in camera to capture sound.

Google and One Plus Phones: Check compatibility. Some models may not support this microphone.

b. Indicator lights are flashing with green light.

OPPO and VIVO Phones: Ensure that OTG is enabled in your phone settings.

2. Why is there noise when recording video, audio, or live streaming?

Please try recording in a different location. It is recommended to avoid testing near 2.4G signals, such as Wi-Fi networks, base stations, etc. If Wi-Fi is enabled, please turn it off and try again.

3. Check the Battery Level of the Microphone and Charging Case

Microphone (MIC):

1. The MIC will automatically display the battery level as soon as it is turned on.
2. When the MIC is on, press the 'M' button to view the current battery level.

Charging Case:

1. When the charging case is charging the MIC, it will automatically display the current battery level.
2. When the charging case itself is being charged, it will also automatically display the current battery level.

Warranty

Products that you buy directly from our **Porodo** website or shop come with a 24-month warranty.

When you buy **Porodo** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at **porodo.net/warranty** and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check:
porodo.net/warranty

Contact Us

If you have any questions about this Privacy Policy, please contact us at:
info@porodo.net

Website: **porodo.net**

Service Support: **support@porodo.net**

Instagram: **[porodo](https://www.instagram.com/porodo)**