



GREEN LION



Green Lion

**WIRELESS REMOTE
KEYBOARD | MOUSE**

SKU: GNWIRKYMS5BK

Model No: GL-AM5

Table of Contents

Product Overview	2
Specifications	2
Product Sections	3
Product function	4
Setup Guide	5
Disposal	8
Warranty	8
Contact Us	8

Product Overview

The Green Lion Wireless Remote is a versatile device designed for seamless control and convenience. It features a mini keyboard, mouse, and IR remote, along with 58 control keys and a voice assistant for ease of use. The remote offers universal compatibility with a 1200 DPI resolution and supports both Type-C charging and dual-mode functionality (IR and 2.4GHz). It's an ideal solution for enhancing your smart device experience, providing intuitive control with its ergonomic design and functionality.

Specifications

Model No	GL-AM5
Material	ABS+Silica Gel
Battery	300mAh
Working Current	12mA
Connectivity	2.4G+Bluetooth
Bluetooth	V5.2
Resolution	800-1200 DPI
Control Range	10 m
Number of Keys	58 Keys
Charging Port	USB-C
Charging Time	2 Hrs
Working Time	34 Hrs
Product Weight	60 g
Product Dimensions	11*42*145 mm
Compatibility	Android/Windows/Mac OS/Linux

Product Sections

1. Power on/off
2. OK
3. Voice
4. Return
5. Menu
6. Cursor Locking
7. Directions Keys
8. Home
9. Volume Up
10. Volume Down



Product function

Infrared remote control function



Support infrared learning

2.4G wireless connection



Up to ten meters as far as

Body motion mouse



Instant response is not delayed

Wireless keyboard



58 Keyboard

Google voice assistant



The 16k sampling rate

Intelligent control



Automatically identify front and cons

Bluetooth wireless connection



Up to ten meters as far as

Setup Guide

A. Pairing

1. Port Pairing (Factory Paired)

Long press OK + BACK, release the button when the light flashes to a slow flash, and plug in the receiving end.

When the GL-AM5 is near the receiving end and the light is off, the connection is successful.

2. Bluetooth Pairing

Long press HOME + BACK to start Bluetooth broadcasting. Release the buttons once the light flashes.

Search for Bluetooth connection named "GL-AM5" Once connected successfully, the indicator light will turn off.

Note: If you need to pair again, enter pairing mode and wait for the indicator to blink for 4 seconds. If pairing fails, repeat the process.

B. Dual Mode Use

When the GL-AM5 is connected to both 2.4G and Bluetooth devices, you can switch between them by pressing the two pairing keys briefly.

C. LED Instructions

1. When not connected: Press the key to flash two green lights, then press the flash key.

2. When connecting: Press the key to flash green light first, then press the flash key for bright light.

D. Cursor Speed Regulation

1. Press OK + Volume + Speed to increase cursor speed; press OK + Volume to decrease speed by one level.

2. The mouse cursor has three speed levels, with the default setting at level 2.

E. Mouse Key Instructions

1. Power on again: The mouse is now on.

2. Dormant wake-up: The mouse wakes from dormant mode to the state before sleep (the mouse is on, and it was previously off).

F. Standby Dormancy

1. When not connected: The mouse will enter hibernation after 4 seconds.
2. When pairing: If pairing is unsuccessful within 120 seconds, the remote stops pairing and enters hibernation.
3. Connecting: If no connection after 120 seconds, the mouse will enter sleep mode. Press any key to wake it up.

G. Description of Special Key Functions

1. OK Key: The OK button is the left mouse button, and the OK button on the mouse acts as the ENTER key.
2. Fn + Space Key (Backlight): Toggles the backlight mode on/off. Switch the light color, and GL-AM5 does not send any key values when switching.

H. Infrared Learning

1. Long Press POWER Key: Hold for 4 seconds until the indicators flash slowly. The remote enters infrared learning mode.

Flash Waiting: Learning time is 20 seconds. If no learning occurs, it will auto-exit after 20 seconds. If learning is successful, the process is complete.

The learning time is 20 seconds. The auto mode will repeat every 20 seconds. If learning is successful, repeat the operation.

2. The infrared head of the TV remote control should be aimed at the GL-AM5 infrared head. Press the infrared button on the TV remote control. The GL-AM5 indicator will stay on for 1 second and then flash out, indicating successful learning.

I. Infrared Code Cleaning

At the same time, hold the OK + Power buttons. The indicator will flash from normal to complete, clearing the learned infrared code and resetting to the default infrared code value of GL-AM5.

J. Mini Keyboard Use


1. Directly flip the GL-AM5 to use the keyboard function. The cursor will automatically turn off.

2. To use the blue character input on the keyboard, press the Fn key + the input blue character key.

K. Low-Power Indication and Charging

1. When the battery is below 3.2V, the red light will flash three times to indicate low power. Below 3V, T1 battery protection starts and stops working.

2. Charging instructions: When charging, the indicator light remains red, and the charging saturation indicator light will automatically turn off when fully charged.

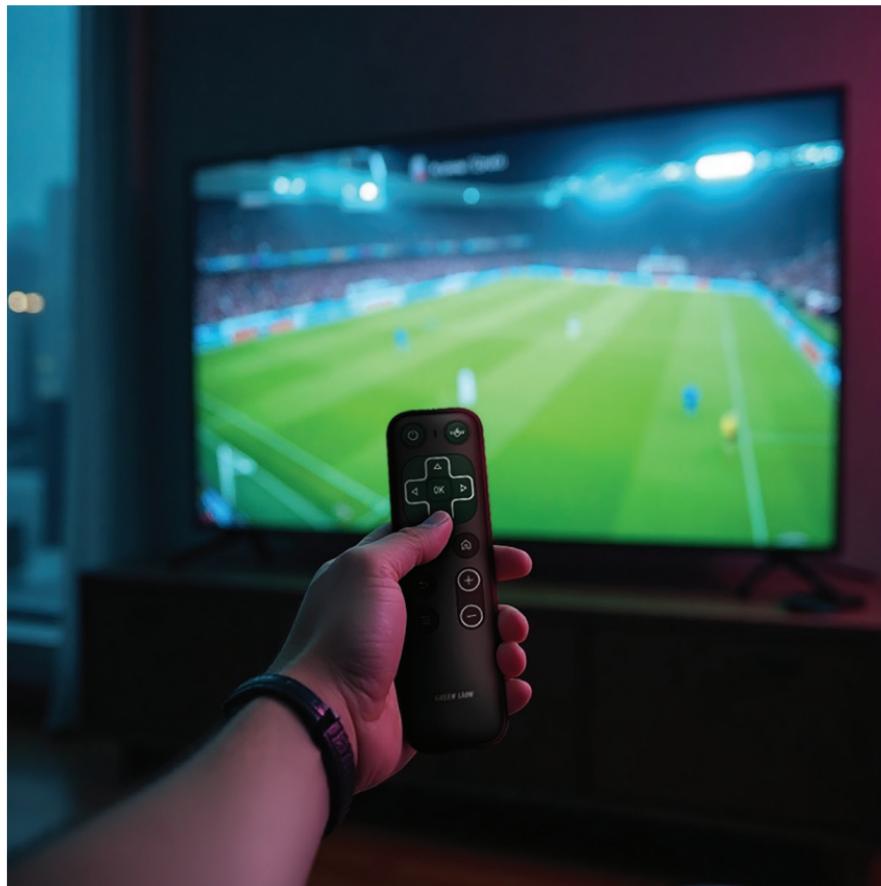

Disposal

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.

Warranty

Products that you buy directly from our **Green Lion** website or shop come with a 24-month warranty.

When you buy **Green Lion** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at <https://www.greenlion.net/warranty> and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check:
<https://www.greenlion.net/warranty>

Contact Us

If you have any questions about this Privacy Policy, please contact us at:

Website: <https://www.greenlion.net/>

Sales: sales@greenlion.net

Service Support: Support@greenlion.net

Telegram: [@greenlion_global](https://t.me/greenlion_global)

Instagram: [@greenlion_global](https://www.instagram.com/greenlion_global)