



GREEN LION



Green Lion

SALZBURG 10000mAh POWER BANK

SKU: GNSALB10PB

Model No: GL-PX85

Table of Contents

Product Overview	2
Specifications	2
Product Sections	3
Setup Guide	4
Safety Precautions	4
Identification of Hazardous Substances	6
Frequently Asked Q&A	7
Disposal	8
Warranty	9
Contact Us	9

Product Overview


The Green Lion Salzburg 10,000mAh Power Bank offers a compact, pocket-sized design with advanced features, including a real-time power display and Quick Charge 3.0 (QC 3.0) for fast charging at 22.5W. It supports both USB-C input/output and USB-A output for versatile charging options, and includes a USB-C lanyard cable. With pass-through charging and flight-approved certification, it's ideal for on-the-go use. Additionally, it features PD 20W fast charging, making it a reliable and efficient choice for powering your devices.

Specifications

Model	GL-PX85
Battery Capacity	10000mAh
Rated Capacity	5300mAh
USB-C1/C2 Input	5V/3A, 9V/2A, 12V/1.5A (18W Max)
USB-C1/C2 Output	5V/3A, 9V/2.22A, 12V/1.67A (20W PD)
USB-A Output	5V/3A, 9V/2A, 10V/2.25A, 12V/1.5A (22.5W Max)
Total Output	5V/3A (15W Max)

Product Weight	174g
Product Dimensions	29.4*54*77mm

Product Sections

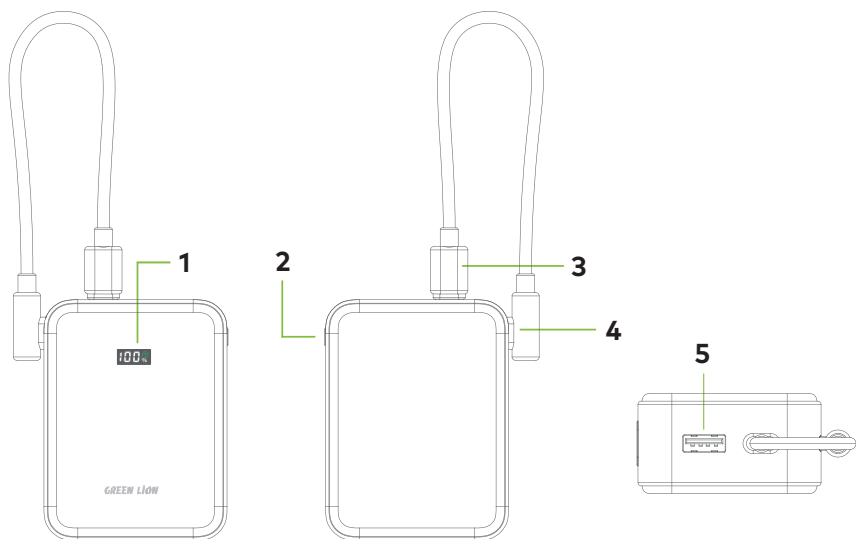

1. Display

2. Switch button

3. Type-C1 Input/Output

4. Type-C2 Input/Output

5. USB-A Output

Setup Guide

A. Scope of Application And Recharging Methods

1. Product usage: Through a Type-C cable with a proper connector, you can charge various digital devices with the power bank.

2. Product charging: When the power bank is of low battery, charge through a proper charging cable via the USB port in a computer, AC adapter, or car charger.

B. Recharging Instructions

1. Power status when charging (input):

When charging, the digital tube flashes and displays the current power status.

When fully charged, it displays "100%" and the light remains on.

2. Power status when charging other devices (output):

When discharging, the digital tube remains on, showing the current battery percentage.

When the power is lower than 0%, the digital tube displays 0% and flashes at 1Hz to indicate low battery.

Safety Precautions

1. The product should be placed on the desktop during use. If it needs to be in contact with the human body, the contact time should be no longer than 10 seconds.

2. The recommended working temperature range of the product is 0°C to 35°C. Do not use it in environments exceeding 35°C or below 0°C.

3. Do not expose the product to fire or water. Do not scrub it with a damp cloth to avoid leakage, short circuit, or other malfunctions.

4. Do not cover the product with paper or other objects that may hinder its heat dissipation and cooling.
5. Do not use this product if unattended.
6. Do not disassemble or maintain the device yourself. It has no components that can be serviced or replaced by the user.
7. Avoid dropping, shaking, knocking, impacting, or squeezing the product.
8. Do not short-circuit the anode and cathode of the product to prevent damage.
9. Keep the product out of the reach of children.
10. Ensure the output voltage of the charger matches the product's requirements. Using an incorrect charger may cause overheating and lead to smoke, fire, and other dangers.
11. Always unplug the charger once fully charged.
12. If abnormal conditions such as odor, heat, discoloration, deformation, or leakage occur, immediately disconnect from the mobile power supply and discontinue use.
13. If using an external power adapter for charging, ensure it meets the required specifications, such as CCC certification and the appropriate standards.
14. If the battery is not replaced properly or the battery type is unsuitable, maintenance personnel should replace it. Improperly replaced or incompatible batteries can be hazardous.
15. Do not expose batteries to extreme environments such as sunlight, fire, or excessive heat. Avoid soaking in water.

Identification of Hazardous Substances

When disposing of this product, please do not put it together with general household waste. It should be handed over to a government-designated recycling center, which is beneficial for environmental protection.


Declaration of Hazardous Substances in Electronic and Electrical Products						
Component Name	Pb	Cd	Hg	Cr6+	PBBs	PBDEs
Shell	○	○	○	○	○	○
PCB	×	○	○	○	○	○
Battery	○	○	○	○	×	×
Screw	○	○	○	○	×	×
Metal components	○	○	○	○	—	—
Data line	○	○	○	○	○	○

This table is prepared in accordance with the provisions of SJ/T11364.

○: Identify that the content of the toxic and harmful substance in all homogeneous materials of the component is within the limit requirements specified in GB/T 26572.

×: The components marked with X in the table above, which indicate that the toxic and harmful substance exceeds the limit requirements specified in GB/T 26572 in at least one homogeneous material of the component, cannot be replaced due to technical reasons. In the future, with technological progress, replacement or improvement will be achieved.

—: According to GB/T 26572, there are no requirements for the content of PBBs and PBDEs in metal components.

 The environmental protection period of this product under normal use is 5 years.

The "hazardous substances" displayed in this table will not cause any harm to human life and the environment under normal use of the product.

The "hazardous substances" and their components displayed in this table are intended to provide consumers and recycling practitioners with information on the presence of relevant substances, which will help with the proper disposal of product waste.

Frequently Asked Q&A

Malfunction	Reasons	Solutions
Indicators can't display a full charge status after a long time of charging the product.	<ol style="list-style-type: none">1. Not enough charging time.2. Adapter or product malfunction.	<ol style="list-style-type: none">1. Charge the product for 12 hours.2. Consult the distributor or the after-sales service.
The remaining power of the product cannot be detected.	<ol style="list-style-type: none">1. No remaining power.2. Power button or indicator malfunction.3. Power failure of the product.	<ol style="list-style-type: none">1. Charge the product again.2. Consult the distributor or the after-sales service.
The product cannot charge up other devices.	<ol style="list-style-type: none">1. Low power of the product.2. No power transmission in the USB cable or the adapter.3. Improper choice of adapters.4. The power management system of the product prohibits the charging for the device.	<ol style="list-style-type: none">1. Charge the product again.2. Change a USB cable or an adapter.3. Look for a proper connector suiting the interfaces of the product.4. The product is incompatible with the device.
The product can charge other devices but can't fully charge them up.	The battery of the product is used up.	Charge the product.

<p>When charging other devices with the remaining power, the product suddenly stops working or fails to display any power.</p>	<p>External short circuit or overload of the product leads to an automatic shutdown for self-protection.</p>	<p>Charge to reactivate the product.</p>
--	--	--

If it has a peculiar smell, overheating, discoloration, deformation, leakage, and other abnormal conditions during use, please stop using it immediately.

If the skin contacts with battery liquid, please wash it immediately with water and go to the hospital in time.

When not in use, please dispose of it properly.

Disposal

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.



Warranty

Products that you buy directly from our **Green Lion** website or shop come with a 24-month warranty.

When you buy **Green Lion** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at <https://www.greenlion.net/warranty> and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check:

<https://www.greenlion.net/warranty>

Contact Us

If you have any questions about this Privacy Policy, please contact us at:

Website: <https://www.greenlion.net/>

Sales: sales@greenlion.net

Service Support: Support@greenlion.net

Telegram: [@greenlion_global](https://t.me/greenlion_global)

Instagram: [@greenlion_global](https://www.instagram.com/greenlion_global)