

porodo



Porodo Blue **Kids 4G Smart Watch with GPS**

SKU: PD-KDWST

Table of Contents

Product Overview	2
Before First Use	2
App Connectivity	2
SIM Card Installation	3
Power ON/OFF	3
Functions Introduction	4
Connection Troubleshooting	5
Specifications	5
Warranty	7
Contact Us	7

Before using the product, please carefully read this User Manual to guarantee correct usage and keep it secure for future reference.

Product Overview



- A. Camera
- B. Touch Button
- C. Switch
- D. Charging Area
- E. SIM Slot

Before First Use

1. Please verify the product number and ensure all accessories are included.
2. Obtain a 4G Nano SIM Card in advance.
3. Ensure this 4G Nano Card supports GPRS and incoming call notifications.
4. Install the "Se Tracker 2" App on your smartphone.

App Connectivity

A. Download

Option 1: Scan the QR code below by the smart phone to download the "Se Tracker 2" App.


Option 2: Navigate to the watch's device information, scan the watch's QR code to download "Se Tracker 2" App.



Android / IOS

B. Register & Log In

Please follow the app's instructions to register and log in to your account. For first-time users, please create an account to sign up. Once the account is created, you can use your username and password to log in to the app. You can also change the language and country settings for easier use.

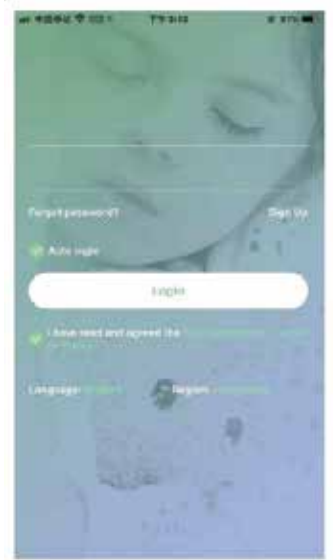

C. Pairing

1. Scan the registration QR Code on the back of the watch or enter the 15-digit registration number.
2. Navigate to the watch's "Information" section, find the registration QR Code, and use your phone to scan it.



SIM Card Installation

1. Please remove the SIM card plate from its slot using the provided tools.
2. Adjust the SIM card at the proper angle
3. Insert it back into the smartwatch.

Power ON/OFF

Power On: Press and hold the switch until the watch powers on.

Power Off:

Method 1: Long press the switch button to power off the watch (applicable when no SIM card is inserted).

Method 2: Navigate to the watch's "Settings" menu, find the "Power off" option, select it, and confirm to power off.

Method 3: Use the mobile phone's "Se Tracker 2" App, find the "Power off" option, select it, and confirm to power off remotely.

Functions Introduction

LBS+GPS+WIFI Location System: In "Se Tracker 2" App you can view the real-time location in the app.

Historical Track: You can review the watch's historical track in the app.

Geo-Fence (Safety Zone): You can set a designated area in the app's map. If the watch exits this area, you will receive a warning message from the app.

Weather Prediction: The watch can automatically update local weather information.

Address Book (Contacts): The watch can store up to 15 contact numbers, which are configurable via the app.

Dialing: The watch can dial numbers. You can enable or disable this function in the app.

SOS: The watch can store 3 SOS emergency calling numbers. Pressing the SOS button on the watch will cause it to repeatedly dial these numbers, and a warning message will be sent to the app. If there is no response, it will repeat dialing for 2 rounds.

Text Message Setting: It will send a text message to the designated emergency contact if the SOS call is unanswered.

Voice Monitor: The app can activate the watch to automatically dial a designated number without alerting the child.

Reject Unknown Calls: Enable this function and the watch will only receive calls from numbers preset in the app. Disable this function to allow calls from any number.

Alarm Clock: You can set up to three alarms through the app.

Camera: Allows for taking photos.

Album: Photos can be saved, deleted, or uploaded to the app.

Remote Camera: The app can activate the watch's camera, and the captured photo will be uploaded to the app.

Video Call (FaceTime): The app supports video calls with the watch.

DND (Do Not Disturb): Allows setting up to four different periods to block all messages and phone calls.

Settings: Change watch faces, adjust volume (+/-), control the watch's brightness, set the time and date, toggle VoLTE, power the device on/off, and view device

information (model number, version number, IMEI number).

Device Information:

1. View registration information.

2. Access app download link.

Math Game: Engage in quick math practice.

Stopwatch: Use for timing activities.

Calculator: Perform calculations.

Family Member: Display all accounts previously linked to this watch.

Reward System: Parents can award "Heart shape" rewards that will be displayed on the watch.

Remote Power Off: The app can remotely turn off the watch.

Remote Restart: The app can remotely restart the watch.

Connection Troubleshooting

If the watch has no internet or any connection, please check the following:

1. Ensure the watch is powered off when you insert the SIM card. After insertion, power on the watch or try restarting it.
2. Verify that your SIM card has an active data plan to access the internet.
3. Make sure the SIM card was inserted correctly and securely at the right angle.

Specifications

SKU	PD-KDWST
Dimensions	228×41×16.1mm
Net Weight	52.5±2g
Display	1.44-inch Square Color Screen
Resolution	240*240
Battery	500mAh Polymer Lithium ion
Charging Time	About 4H

Standby Time	About 4-6 days
Application	Se Tracker 2
BT Name	PD-KDWST
Chip	ASR3603S
OS	RTOS 32 bit
Main Frequency	832MHz
Processor	One-core ARM Cortex-R5
Memory	RAM 128Mb+ROM 196Mb
Charging Method	4PIN Micro Magnetic suction charging cable
Charger Specifications	Output: 5V/300mA (the product does not have a charger)
GPS	LBS & WiFi
Positioning Accuracy	LBS: 1000-100m, WiFi: 10 - 100m
Support Net	GSM\WCDMA\FDD-LTE
Frequency Band	FDD: B1 B2 B3 B5 B7 B8 B20 WCDMA: B1 B2 B5 B8 GSM: B2 B3 B5 B8
Camera	80000px
Network support	2G/3G/4G
Material	Shell: ABS plastic, Strap: Silicone
Supported Phone OS	Android 5.0 and above; iOS 9.0 and above

Warranty

Products that you buy directly from our **Porodo** website or shop come with a 24-month warranty.

When you buy **Porodo** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at **<https://porodo.net/warranty>** and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check:

<https://www.porodo.net/warranty>

Contact Us

If you have any questions about this Privacy Policy, please contact us at:

info@porodo.net

Website: **porodo.net**

Service Support: **support@porodo.net**

Instagram: **[porodo](https://www.instagram.com/porodo)**