

porodo
LIFESTYLE



Porodo Lifestyle

Dual Spin Clockwise
& Reverse Portable Blender 240W

SKU: PD-PBLNDR



Table of Contents

Warning	2
Product Overview	3
Instructions for Use	3
Indicator Light Guide	5
Specifications	5
Troubleshooting	6
Warranty	7
Contact Us	7

Before installing and using the product, please carefully read this User Manual to guarantee correct usage and keep it secure for future reference.

Warning

- 1.** Do not remove the lid or add anything rigid to your blender during operation.
- 2.** Do not clean your blender in a dishwasher. This product is NOT dishwasher safe.
- 3.** Do not submerge the base in water. Ensure the blender is turned off before cleaning to avoid damage to the base components.
- 4.** Do not use a microwave or hot water above 80°C to disinfect your blender.
- 5.** Do not place your blender in the freezer.
- 6.** Do not use any metallic spiral balls to clean your blender, as this may scratch or damage the parts.
- 7.** Do not attempt to charge your blender while it is wet.
- 8.** Do not repair or disassemble your blender yourself.



Do not put it in the dishwasher.




Keep away from fire.



Do not put in microwave oven



Fragile




Food contact compliance


The USB port is waterproof. However, it is prohibited to soak the base in water or place it in the dishwasher for cleaning to avoid damaging the battery due to water exposure.



Do not mix hard-shelled fruits, nuts, or large pieces of frozen fruits. It is recommended to cut fruits or vegetables into small pieces of 1 inch/2.5 cm to avoid jamming the blade and triggering the protection mechanism.

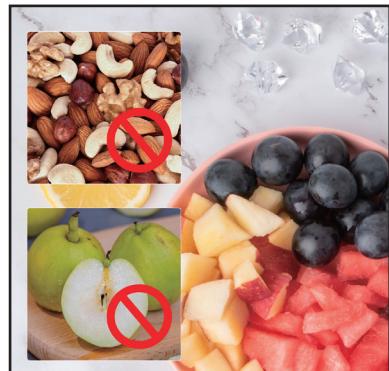

K Product Overview

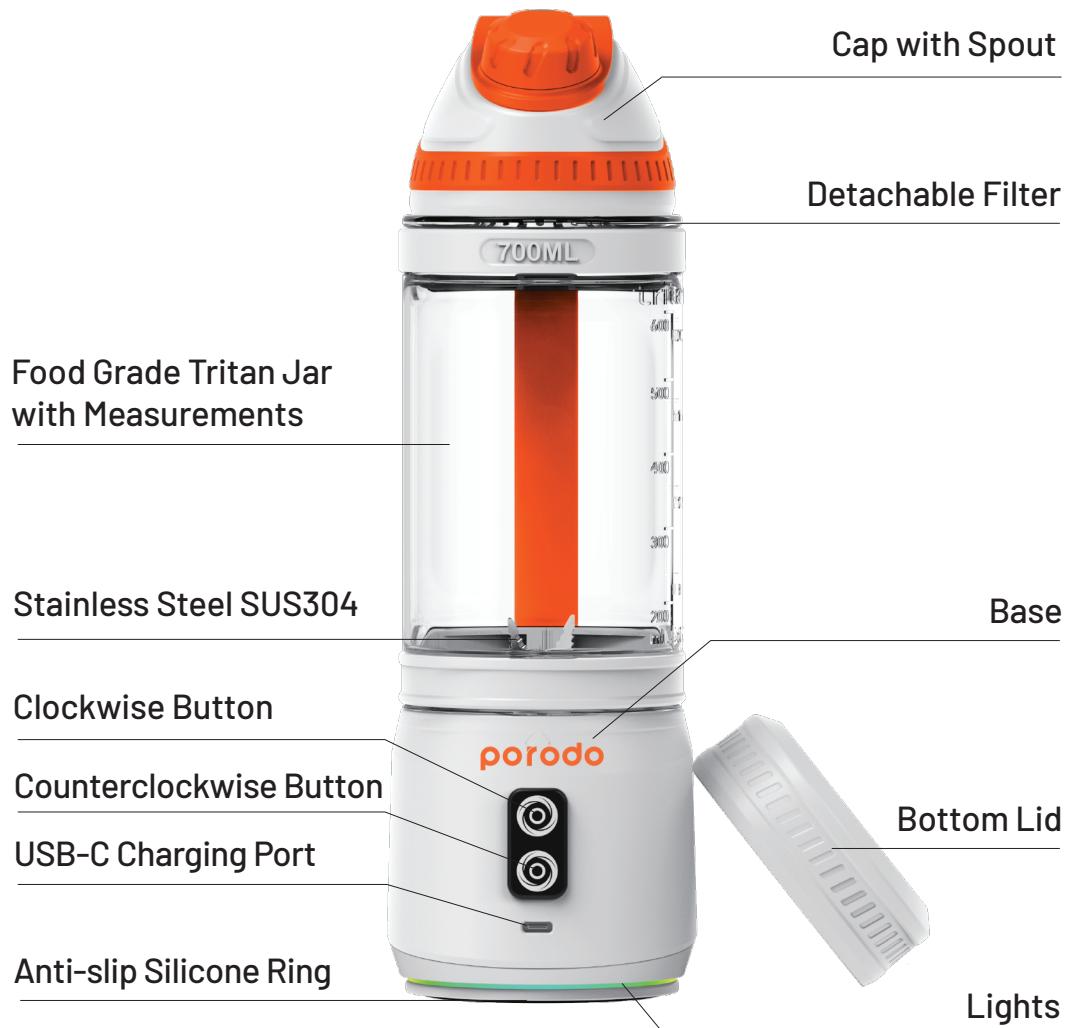

K Instructions for Use

A. Your First Blend

Ensure your blender is fully charged by verifying that all indicator lights are green prior to your initial blend. Securely tighten the body and base until the arrow on the bottle aligns with the power button. Remember to promptly clean the blender after use.

B. Charging

1. The product is compatible with a USB-C cable rated at 5V/2A. It can also be charged via a power bank with 5V/2A output.
2. If the product has not been used for an extended period, fully charge it initially to maintain the battery in a high voltage state and prevent damage.

C. Select Blending Mode

[A] Clockwise Blend Mode

1. Activate the blending process in a clockwise direction by pressing the upper button twice.

2. To stop, press the button once more.

3. The bottom green lights will flash and spin clockwise.

4. Once the operation is complete, the lights will turn off after 5 seconds.

[B] Counter-Clockwise Blend Mode

1. Initiate the blending process in the reverse direction by pressing the lower button twice.

2. To stop blending, press the button once again.

3. The bottom multi-color indicator lights will flash and spin counterclockwise.

4. After completion, the lights will deactivate after 5 seconds.

D. Blending Instructions

Step 1: Chop fruits into small pieces before adding them to the blender, filling approximately 60 % of the jar's capacity.

Step 2: Pour in a drinkable liquid until it reaches 80 % of the jar's capacity.

Step 3: Secure the lid and gently tilt the blender to ensure that no fruit pieces are stuck beneath the blades.

Step 4:

a. Clockwise Mode: Press the upper button twice to blend in a clockwise direction.

b. Anti-Clockwise Mode: Press the lower button twice to blend in an anti-clockwise direction.

c. During Operation: Press the button once to stop at any time.

d. Intelligent Function: The blender will automatically switch blending modes and change the direction of spin if the blades become jammed, ensuring smoother operation.

Step 5: Install the bottom lid and enjoy your delicious juice or smoothies.

Step 1



Step 2



Step 3



Step 4



Step 5



Indicator Light Guide

Battery Level	Light
1 % - 17 %	All lights are off.
18 % - 33 %	Two green lights illuminated
34 % - 50 %	Four green lights illuminated
51 % - 67 %	Six green lights illuminated
68 % - 83 %	Eight green lights illuminated
84 % - 99 %	Ten green lights illuminated
100 %	All twelve green lights on, red light off

Specifications

Product Name	Porodo Lifestyle Dual Spin Clockwise & Reverse Portable Blender
SKU	PD-PBLNDR
Battery Capacity	2000mAh ×3
Voltage	12V
Motor	18000RPM
Power	240W
Charging Voltage/Current	5V/2A
Jar Capacity	700ml
Charging Time	3h
Blending Time	30 Seconds/Cycle
Total Working Time	Up to 40 Cups
Jar Material	Tritan
Blade Material	304 Stainless Steel
Base Material	ABS
Product Weight	770g

Troubleshooting

Problem	Cause	Solution
Unable to Operate: Red and Yellow Lights Flashing	Battery is Low	Charge for 3 to 4 hours to ensure a full charge.
Cannot Power On: Red Lights Flash Eight Times	Safety Power Button Turned Off	Tighten the jar and base to ensure the bottle arrow aligns with the power button.
Stops Functioning: All Indicator Lights Flicker Red for 8 Seconds	Contents Too Thick or Excessive Volume, Triggering Motor Overload Protection	Add some liquid or cut ingredients into smaller pieces, then restart the device.
Leakage Detected	Seal Not Properly Aligned; Jar or Cap is Cross-Threaded	Inspect seals and check thread alignment when securing the jar or cap.
Unable to Fully Recharge Within 4 Hours	Incompatible Recharging Cable or Adapter Used	Examine the recharging adapter or cable, and ensure it is 5V/2A.



Warranty

Products that you buy directly from our **Porodo** website or shop come with a 24-month warranty.

When you buy **Porodo** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at [**https://porodo.net/warranty**](https://porodo.net/warranty) and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check:

[**https://www.porodo.net/warranty**](https://www.porodo.net/warranty)

Contact Us

If you have any questions about this Privacy Policy, please contact us at:

info@porodo.net

Website: **porodo.net**

Service Support: **support@porodo.net**

Instagram: **porodo**