

PORODO



Porodo

**ENDURA FIT Smart Watch
with 1.80" HD Display**

SKU: PDSW1830H

Table of Contents

Package Contents	2
Product Overview	2
Charging Instructions	2
Install the App	3
Instructions for Use	4
Shortcuts Guide	4
Notification Settings	6
Call Management	6
Multi-Sport Modes	8
Primary Functions	10
Settings	12
Specifications	15
Precautions	16
Disposal	16
Warranty	17
Contact Us	17

Package Contents

1. Porodo Smart Watch
2. Charging Cable

Product Overview

1. **Touch Screen:** Displays watch data. Swipe or tap the screen to navigate and select functions.
2. **Side Button:** Press and hold the side button to power the device on. Press the side button to return to the watch interface.
3. Heart Rate Sensor
4. Charging Contact Area



Charging Instructions


1. Before using your smartwatch for the first time, ensure it is fully charged.
2. The smartwatch requires approximately 2.5 hours to reach a full charge. Once the charger is plugged in, the smartwatch will begin charging automatically.

3. Ensure that the charging pins on the cable align properly with the charging pins on the back of your smartwatch. Then, connect the other end of the cable to a power source.



Install the App

- 1.** Download and install the "OPLAYER" app by scanning the QR code with your phone. Select the corresponding version based on your mobile platform.
- 2.** Alternatively, you can search for "OPLAYER" in your mobile app store and install it directly from there. The app is compatible with Android 8.0+ and iOS 12+versions.

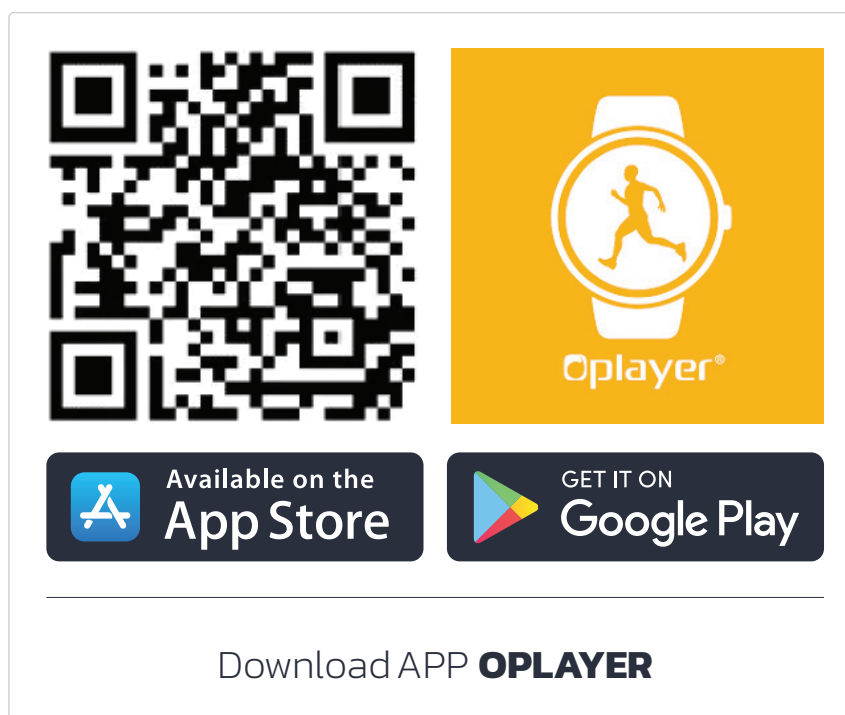

Instructions for Use

1. Press and hold the side button for 3 seconds to turn on the smartwatch. Swipe up, down, left, or right to explore additional options.




2. Main Interface Overview



3. After turning on the smartwatch, the watch face will appear. Press and hold for 5 seconds to select a different clock face of your choice.

Shortcuts Guide

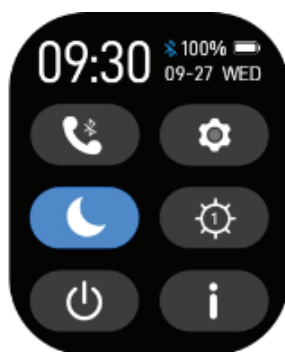



Bluetooth Call Connection: This icon allows you to switch the Bluetooth connection for calls. Tap this icon to connect the watch to your phone's Bluetooth. Once connected, the watch can answer calls and play music.



Settings: Access the settings menu for various configurations.



Sleep Mode: Activate sleep mode to minimize disturbances during rest.



Screen Brightness: Tap the brightness icon to adjust the screen brightness by increasing or decreasing it.




Power Off: Tap to turn off your smartwatch.



About: Find your smartwatch's MAC address and software version in the "About" section.


Notification Settings

Swipe up on the dial interface to view notifications, including incoming calls, text messages, and updates from apps such as WhatsApp, Facebook, and more. Notifications will be automatically deleted after being read.

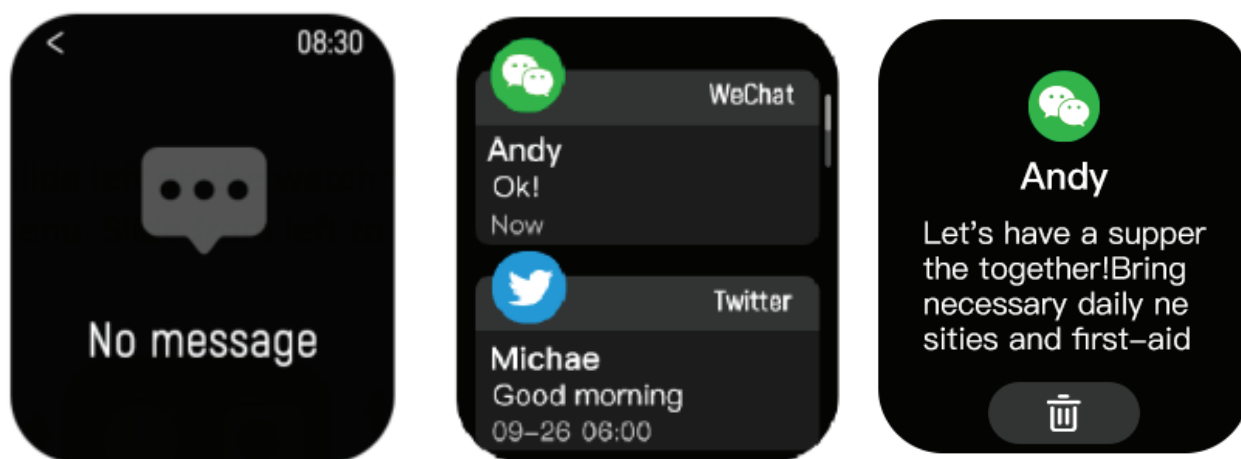

Call Management

To access the menu interface, press and hold the button for 1 to 2 seconds while on the dial interface. This will allow you to enter and view all available menus.

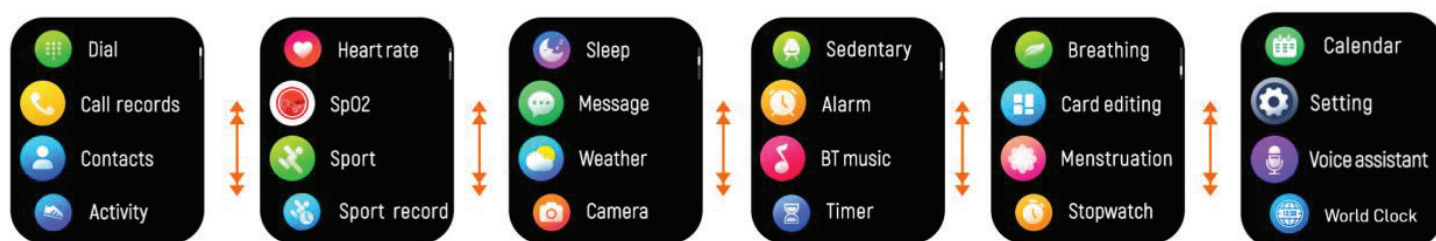



1. Dial: Tap this function to enter the dial interface. Pair your mobile phone with the watch by enabling Bluetooth on your phone and searching for the device name of the watch. Once the pairing is successful, you can make calls directly from the watch.



2. Contacts:

2.1 To use the contacts feature, first connect the watch to the app and add your quick contact information through the OPLAYER app settings. The added contacts will be displayed on the watch after saving. Tap the contacts function to view the previously added contacts.

2.2 Next, enable Bluetooth on your phone and search for the device name of the watch to establish a connection. Once connected, select a contact from the list to make a call. To end an ongoing call, tap the red hang-up button.

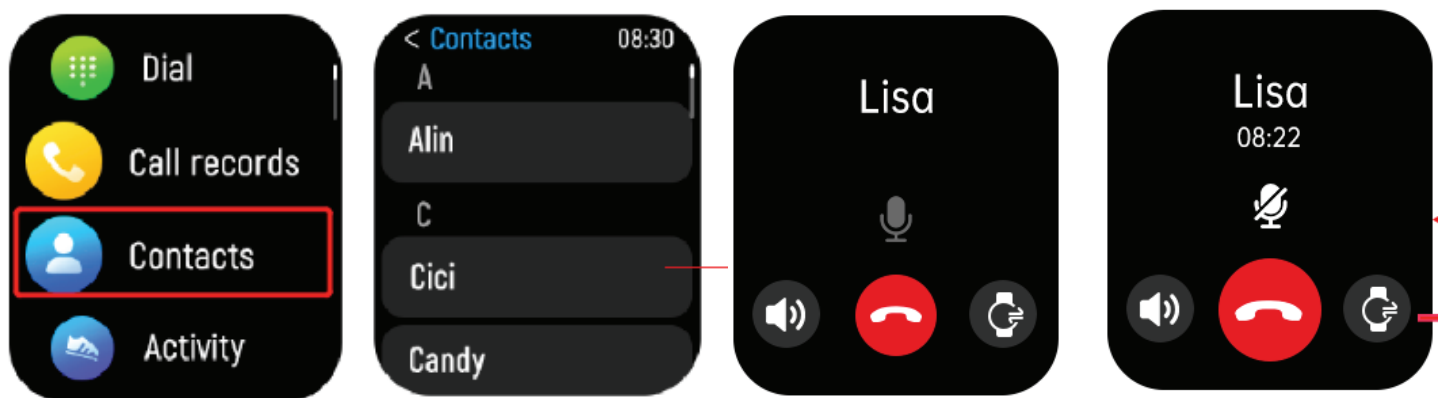


Mute Call



Answer with Watch




3. Call Records: Tap on the call log to view the list of call records, including call duration and contact names. Ensure Bluetooth is enabled on your phone and search for the device name of the watch to connect and pair.

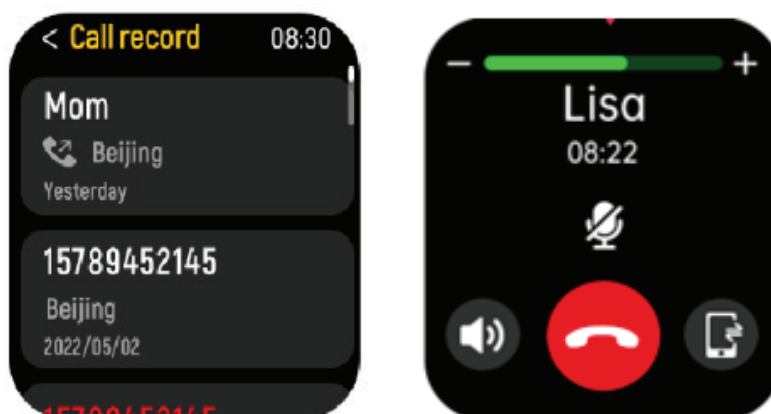


Multi-Sport Modes


Tap the icon to enter the multi-sport modes. To end the sport session, swipe from left to right on the screen and tap to finish.




The () icon can be used to lock the movement, preventing accidental touches during use.




The () icon allows you to quickly start a new activity.

The () icon lets you pause the activity.

The () icon finishes your sport session and saves the activity data.

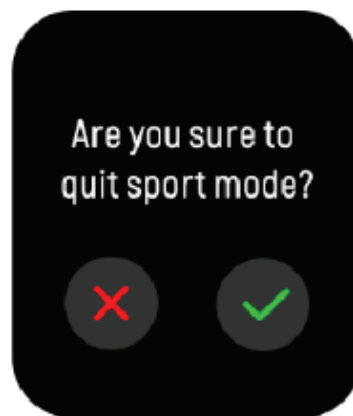

Note: A reminder will appear once your sport data reaches the goal you have set.

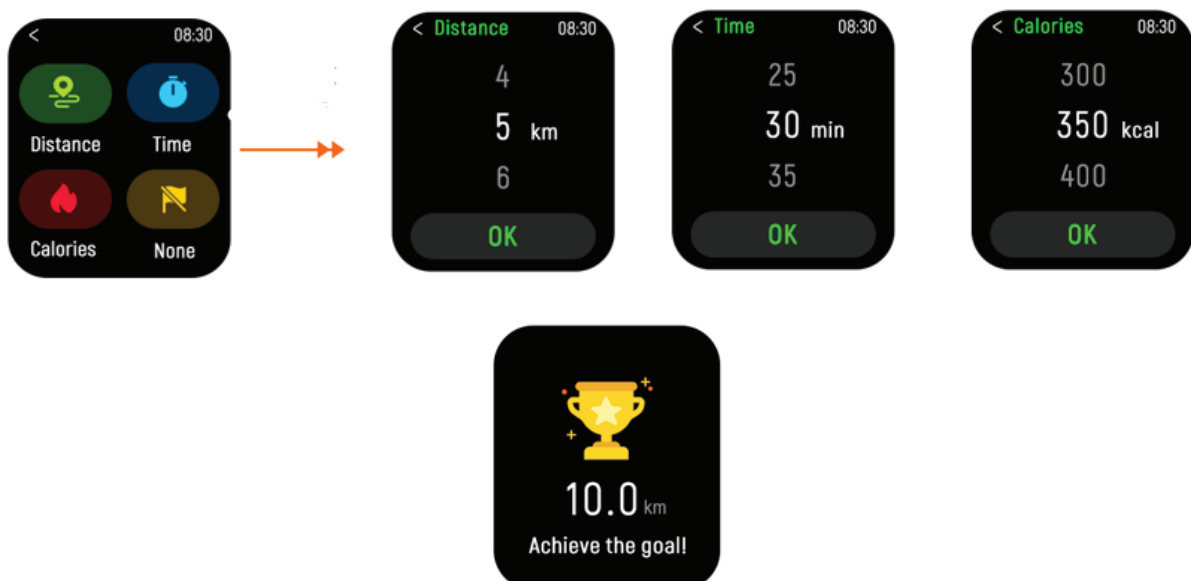

Primary Functions

1. Heart Rate Monitor

Tap the icon to monitor your current heart rate. To exit the heart rate monitor, swipe from left to right on the screen.




2. Blood Oxygen Monitor

Tap the icon to monitor your current blood oxygen levels. To exit the blood oxygen monitor, swipe from left to right on the screen.



4. Sleep Monitor

The sleep monitor automatically tracks your sleep between 9:00 p.m. and 9:00 a.m.

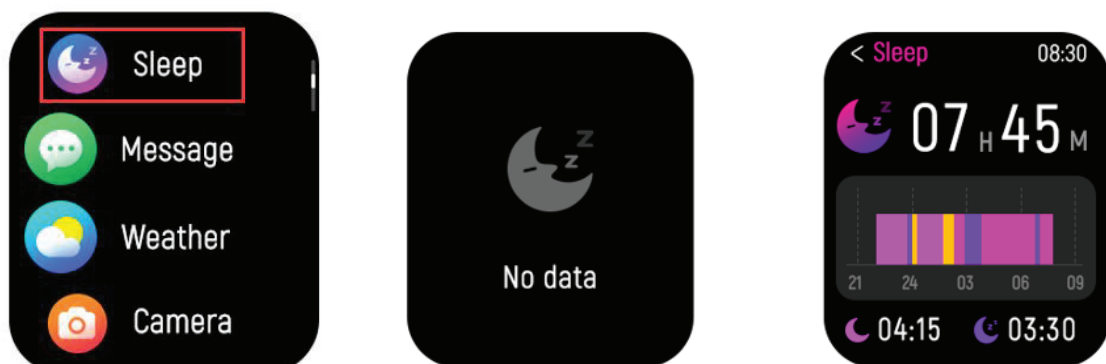


5. Weather

The smartwatch will display the weather once a connection with the app has been established.




6. Camera Shutter

Use your smartwatch to take pictures remotely.

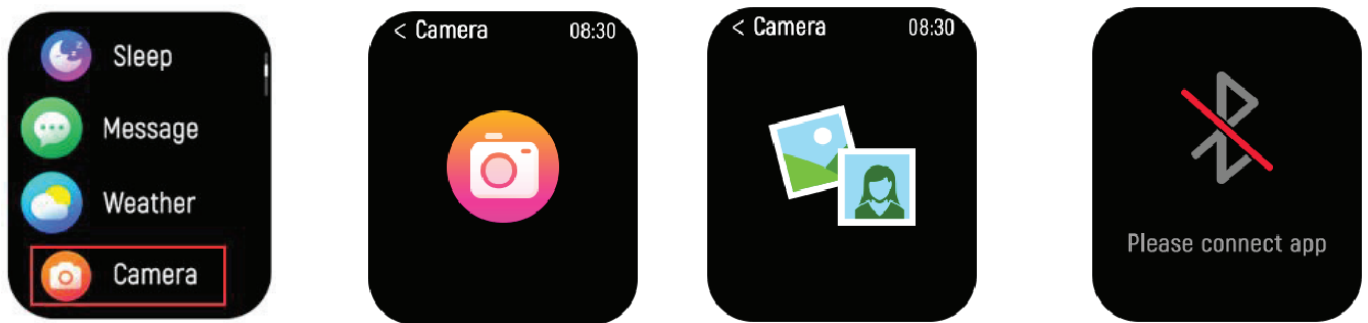


7. Music Control

Tap the music icon to access the music playback control interface. From here, you can select the previous or next song, as well as play or pause the music. To exit the music control interface, swipe from left to right on the screen.

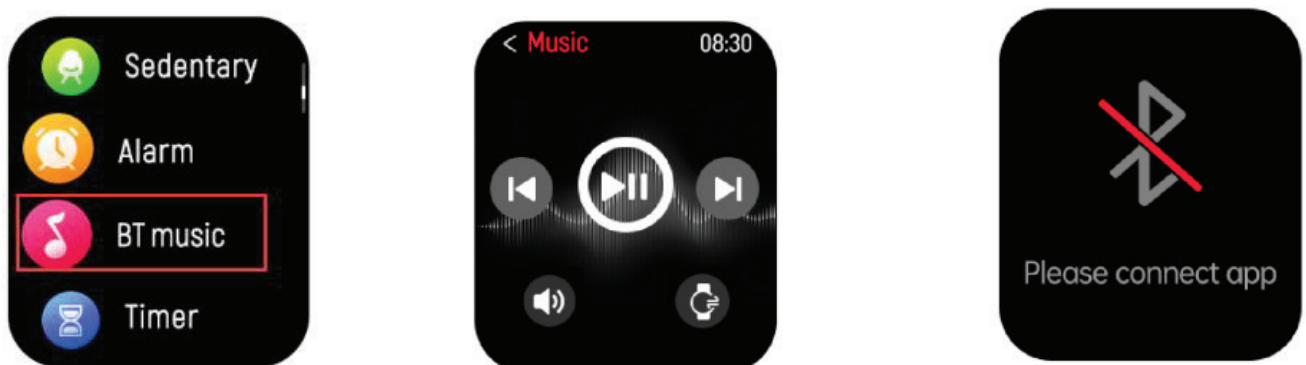


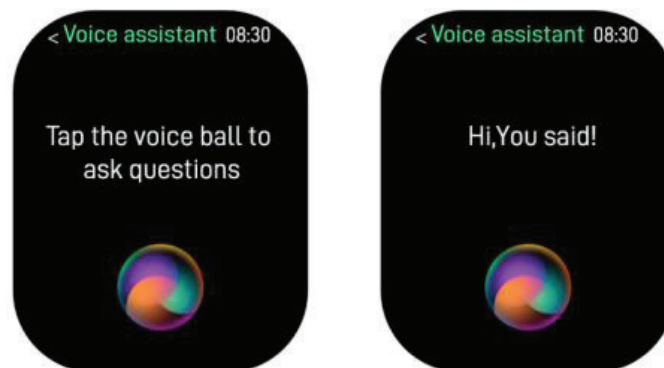
8. Sedentary Reminder

Set the time intervals (in minutes), start time, and end time through the app. You can enable or disable the sedentary reminder as needed. To exit, swipe from left to right on the screen.

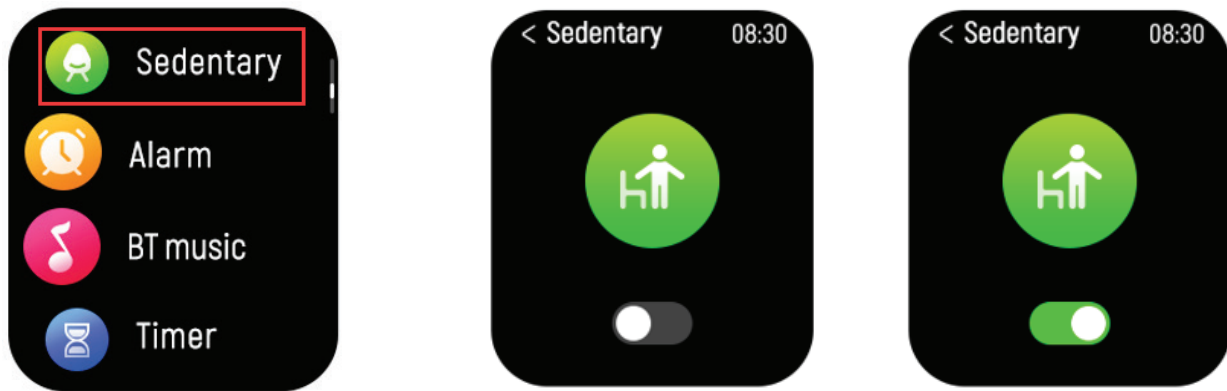


9. Voice Assistant

Connect the watch's call Bluetooth () to enable voice control. Once connected, activate the phone's voice assistant by using the designated wake-up command.



Settings

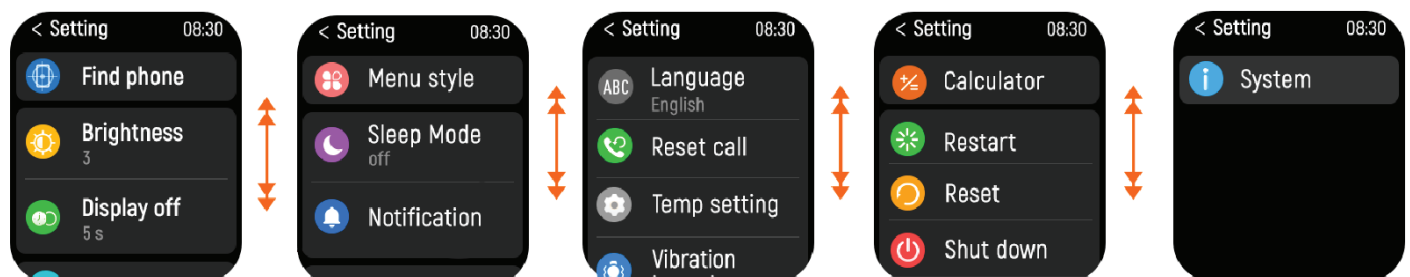



Find Phone

Use this feature to locate your smartphone.




Screen Brightness

Tap the brightness icon to adjust the screen brightness, either to increase or decrease the level.




Display Duration

You can choose the display duration, with the longest option being 200 seconds.




Switch Watch Face

Swipe from right to left to select your preferred watch face.




Menu Style

Choose between three menu styles: a four-square grid, a nine-square grid, or a list display.



Power Saving

Activate power-saving mode to reduce the watch's power consumption. Please note that some features may be disabled, and the screen brightness will be dimmed.



Message Display Settings

You can customize the message push display method. Reminders can appear either at the top or bottom of the dial. Additionally, the watch's language can be switched via the app.



Language Switching

Select the desired regional language through the app to switch the language on your smartwatch.



Call Reset

Tap OK to clear all contacts and call history.



Vibration Intensity

Adjust the vibration intensity of the watch to your preference.



Computer Function

Tap to access the computer function of the watch.




Restart the Watch

Click to restart the smartwatch.



Reset the Device

Click Reset to clear all data stored on the watch.



Power Off

Switch off your smartwatch by tapping this option.



About

Access the About section to find the MAC address and software version of your smartwatch.



Audio Settings

This function allows you to control the Bluetooth call connection and adjust audio output settings.

Specifications

Screen Size	1.80"
Screen Resolution	IPS 240x286
Chipset	Jieli7012F
Bluetooth Version	260mAh
Charging Time	2.5H
Working Time	Up to 5 days
Standby Time	Up to 15 days
Water Resistant Level	IP67
System Compatibility	Android 8.0+, iOS 12+
Bluetooth Frequency	2402mhz-2480mhz
Dimension	10.7 x 36.7 x44.5mm
Weight	37g

Precautions

- 1.** Ensure that both the device and its accessories remain dry to prevent the buildup of dirt and bacteria.
- 2.** Avoid using a microwave, blower, or any other heat sources to dry or heat the device. Refrain from using the device in high-temperature environments or placing it in areas subject to extreme heat.
- 3.** Protect from strong impacts or vibrations, as these may cause damage to the device or its accessories. Keep the product away from direct sunlight, high temperatures, humidity, or open flames.
- 4.** Keep the device away from children and animals to prevent accidental ingestion or damage.
- 5.** Protect the device from impacts and avoid dropping it, as this could cause significant damage.
- 6.** Do not expose the device to extreme temperatures, as this may affect its performance and longevity.
- 7.** Do not clean the device with abrasive detergents, as these may cause surface damage. Use a soft, damp cloth for cleaning instead.
- 8.** After charging, always disconnect the charging cable from the power source to prevent short circuits when the cable comes into contact with conductive objects.
- 9.** This smartwatch is not a medical device. The data provided by the watch is for reference purposes only and should not be used for diagnostic or treatment purposes.

Disposal

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.

Warranty

Products that you buy directly from our **Porodo** website or shop come with a 24-month warranty.

When you buy **Porodo** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at **porodo.net/warranty** and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check:
porodo.net/warranty

Contact Us

If you have any questions about this Privacy Policy, please contact us at:
info@porodo.net

Website: **porodo.net**

Service Support: **support@porodo.net**

Instagram: **[porodo](https://www.instagram.com/porodo)**