



GREEN LION



Green Lion

TRI-FOLD WIRELESS KEYBOARD

SKU: GNTRIKYBDGY

Model No: GKM-55

Table of Contents

Product Overview	2
Specifications	2
Setup Guide	3
Cleaning and Maintenance	8
Safety Precautions	8
Disposal	9
Warranty	9
Contact Us	9

Product Overview

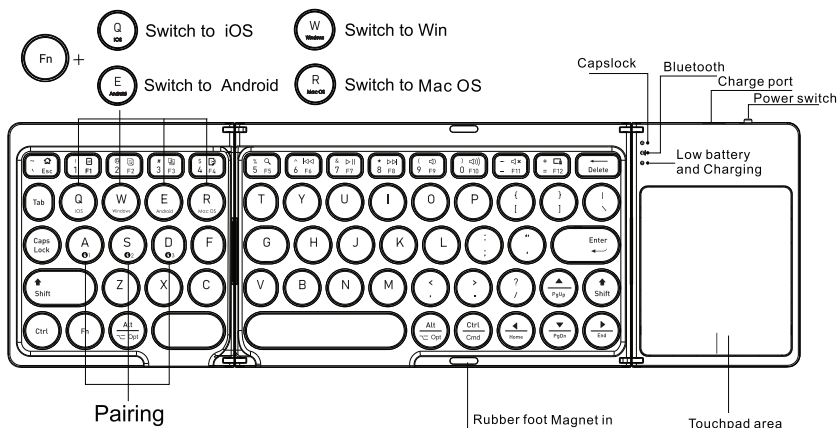
The Green Lion Tri-Fold Wireless Keyboard features a sleek and compact design with a scissor-switch structure, providing smooth and quiet keystrokes. It offers a long-lasting 5 million keystroke lifespan and efficient 400-hour standby time. This keyboard is highly portable due to its tri-fold design, making it an ideal option for on-the-go use. Additionally, it features high-sensitivity touchpad functionality, supports stable wireless connectivity up to 10 meters, and is compatible with multiple devices, ensuring convenient and quick input.

Specifications

Model	GKM-55
Material	ABS+PC
Bluetooth Version	V5.0
Battery Capacity	180 mAh
Operating Voltage	3.3–4.2 V
Touchpad Current	≤ 7.5 mA
Standby Current	< 0.5 mA
Operating Current	≤ 2.5 mA
Sleep Time	10 minutes
Operating Range	10 meters

Button Lifespan	5 million cycles
Charging Interface	Type-C
Charging Time	2 hours
Working Time	≥ 20 days
Supported Systems	Windows, Android, iOS, MacOS
Product Weight	158 grams
Folded Size	15.8*98*157.5 mm
Unfolded Size	8.2*98*315 mm

Setup Guide



- Fn + A** Press Fn + A for 3S, enter pairing mode. (Bluetooth KB-01)
Press Fn + A for 1S, turn to Bluetooth device.
- Fn + S** Press Fn + S for 3S, enter pairing mode. (Bluetooth KB-02)
Press Fn + S for 1S, turn to Bluetooth device.
- Fn + D** Press Fn + D for 3S, enter pairing mode. (Bluetooth KB-03)
Press Fn + D for 1S, turn to Bluetooth device.

1. Bluetooth Connect

Switch the power to "ON." The Bluetooth LED will light up. Then, press the combination keys "FN + A/S/D" to enter Bluetooth pairing mode. On your computer or phone, go to "Settings," turn on Bluetooth, and search for Bluetooth devices. When the "Bluetooth Keyboard" appears, click to pair. Once successfully connected, the Bluetooth indicator light will turn off, and the keyboard will be ready to use.

2. Status Display LED

Connect: Open the power switch; the red light will illuminate. Press the connect button, and the red light will blink.

























































Charging: The indicator light will show red. After full charging, the light will turn off.



























































Low Voltage Indication: When the voltage drops below 3.3V, the red light will blink.

Remarks: To extend the battery life, please turn off the power when the keyboard is not in use for an extended period.












3. Function Keys

 Switch to iOS			 Switch to Android		
Fn+	=	Corresponding functions	Fn+	=	Corresponding functions
		Home			Home
		Select all			Select all
		Copy			Copy
		Paste			Paste
		Cut			Cut
		Search			Search
		Prev			Prev
		Break			Break
		Next			Next
		Volume -			Volume -
		Volume +			Volume +
		Mute			Mute
		Lock screen			Lock screen
		Delete			Delete











 +  Switch to Win			 +  Switch to Mac OS		
Fn + shift +	=	Corresponding functions	Fn +	=	Corresponding functions
		Home			Desktop
		Select all			Select all
		Copy			Copy
		Paste			Paste
		Cut			Cut
		Search			Search
		Prev			Prev
		Break			Break
		Next			Next
		Volume -			Volume -
		Volume +			Volume +
		Mute			Mute
		Lock screen			Lock screen
		Delete			Delete

4. Touch pad function




Function of Win10+ Version








1-Finger	2-Finger	3-Finger
 Left Click Double Click	 Right Click	 Invoke Search
 Move Cursor	 Scroll/Pan	 Multitasking Gestures
 Type+Slide	 Zoom in Zoom out	<h3>4-Finger</h3>
		 Invoke Action Center

Function of iOS13+ Version

1-Finger	2-Finger	4-Finger
 Left Click Double Click	 Zoom in (out) on the web page	 Invoke Action Center (Cmd+Shift)
 Move Cursor	 Scroll/Pan	
<h3>3-Finger</h3>		
 3-Click Open / Hide the bottom application program bar	 3-Finger slide up Return to desktop	 3-Swipe down Return to the desktop
 3-Swipe right Switch active window to the right(Cmd+Tab)	 3-Swipe left Switch the active window to the left(Cmd+Shift+Tab)	

Android 系统对触摸板功能

1-Finger	2-Finger
 Left Click Double Click	 Move Cursor
	 Scroll/Pan

1-Finger	2-Finger	3-Finger
 Left Click Double Click  Move Cursor	 Zoom in (out) on the web page  Scroll/Pan	 3-Swipe right Switch active window to the right(Cmd+Tab)  3-Swipe left Switch the active window to the left(Cmd+Shift+Tab)
4-Finger	 Invoke Action Center (Cmd+Shift)	

Cleaning and Maintenance

Keep the keyboard away from liquid or humid environments, such as saunas, swimming pools, or steam rooms. Avoid getting the keyboard wet in the rain.

Do not expose the keyboard to extreme temperatures.

Avoid leaving the keyboard under direct sunlight for extended periods.

Keep the keyboard away from flames, such as those from cooking stoves, candles, or a fireplace.

Prevent sharp objects from scratching the keyboard and ensure it is regularly recharged for optimal performance.

Troubleshooting

For assistance, please contact customer service.

Safety Precautions

This section outlines cases not covered by the warranty:

Damage caused by accidents, misuse, improper operation, unauthorized repairs, modifications, or removals.

Improper operation or maintenance, including violations of the provided instructions or use with incompatible power supplies.

Disposal

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.

Warranty

Products that you buy directly from our **Green Lion** website or shop come with a 24-month warranty.

When you buy **Green Lion** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at <https://www.greenlion.net/warranty> and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check:
<https://www.greenlion.net/warranty>

Contact Us

If you have any questions about this Privacy Policy, please contact us at:

Website: <https://www.greenlion.net/>

Sales: sales@greenlion.net

Service Support: Support@greenlion.net

Telegram: [@greenlion_global](https://www.instagram.com/greenlion_global)

Instagram: [@greenlion_global](https://www.instagram.com/greenlion_global)