



Green Lion

8" Desktop Fan 3-Blade| Rechargeable

SKU: GN8INDSKFWH Model No: GL-DF11

Table of Contents

Product Overview	2
Specifications	2
Schematic View	3
Product Features	4
Operating Instructions	4
Safety Notes	6
Disposal	6
Warranty	7
Contact Us	7

Product Overview


The Green Lion 8" Desktop Fan is a portable, rechargeable fan with a 3000mAh battery and a 2200 RPM motor. It offers three speed levels and a 150° wide oscillation for efficient airflow. The fan features a child-safe design, an anti-slip base, and a Type-C charging port. It also includes an adjustable head and a built-in 2-mode flashlight for added convenience. The fan can run for up to 6 hours on the first gear and is designed for quiet operation.



Model No.	GL-DF11
Material	ABS
Battery	3000mAh
Power	5W
Speed Levels	3-Gears
RPM Range	2000-2200 RPM
Airflow	3.9 m/s
Oscillation	150°
Angle Adjustable	90°
Light Modes	Low-High
Brightness	20-28 lm
Noise Level	40 dB
Power Input	5V 1A
Charging Port	Type-C
Charging Time	6 hours
Working Time	3-6 hours

Product Weight	538 g
Product Dimensions	125 x 210 x 300 mm

Schematic View

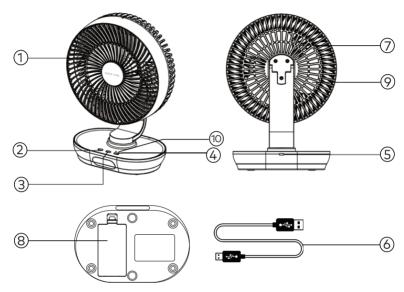

- 1. Front Louver (Manual adjustment of 90° up and down)
- 2. Oscillating Switch
- 3. LED Light Switch
- 4. Fan Switch
- 5. Type-C Charging Port
- 6. USB Charging Cable
- 7. Blade Specifications
- 8. Rechargeable Battery Cover
- 9. Blade Louver
- 10. Indicator

Product Features

- **a.** Quiet Operation: The fan operates quietly, ensuring a peaceful and disturbance-free environment.
- **b.** Child-Safe Design: It has a child-safe design, making it a secure choice for households with children.
- **c.** Anti-Slip Base: The anti-slip base ensures the fan remains stable and prevents any unwanted movement.
- **d.** Adjustable Head: The fan's head is adjustable, allowing you to customize the direction of airflow to suit your needs.
- **e.** 150° Wide Oscillation: With a 150° wide oscillation, the fan covers a large area, providing optimal airflow across the room.
- **f.** Type-C Charging: The fan is equipped with a Type-C charging port, offering a modern and efficient charging method.
- **g.** 3 Speed Levels: It offers three speed levels, allowing you to select the airflow intensity that suits your preference.
- **h.** 2-Mode Flashlight: The fan includes a built-in 2-mode flashlight, offering two levels of brightness for added convenience.
- i. 3000mAh Battery: Powered by a 3000mAh battery, the fan provides extended usage before needing a recharge.
- j. 2200 RPM Motor: The 2200 RPM motor delivers powerful airflow, ensuring effective cooling.
- **k.** 28 Im Brightness: The fan features 28 lumens of brightness, providing enough light for your surroundings when needed.
- **I.** Long Battery Life: The fan has a long battery life, with up to 6 hours of operation on the first gear, 3.5 hours on the second gear, and 3 hours on the third gear.

Operating Instructions

1. Unplug the USB cable from the fan. Ensure the power is off before installing the battery. Turn on the fan by using the adjustable speed switch.

- 2. Insert the battery into the fan and connect the Micro USB cable to charge the fan. The red light will indicate that the fan is charging, and it will turn green once fully charged.
- 3. The fan will not operate once the battery runs out.

Three Buttons Functions:

- **1.** Fan Switch: Gently press the button to turn the fan on. The default low-speed gear will activate, and the left indicator light will turn on. Lightly press the button again to turn it off.
- **2.** Light Button: Press once to switch to the first gear with low brightness. Press twice to switch to the second gear with high brightness. Tap again to turn off the light.
- **3.** Wind Speed Button: In shutdown mode, this button is inactive. In operation mode, tap to switch between gears: low gear, medium gear, high gear, and cycle through.

Indicator Lights:

- **1.** When turned on, the fan will show blue indicator lights. The default low-speed setting is in use, and the left indicator light will be on.
- 2. When the wind speed is in the middle range, the left 1 and left 2 blue lights will turn on.
- 3. When the wind speed is high, all blue lights will be on.

Charging Status:

- 1. In Charging Mode: The display will cycle through the lights in marquee mode. (Left 1 is on, left 2 is on, and all lights cycle on and off in this pattern.) Once fully charged, all three indicator lights will remain on.
- 2. When Charging and Operating Simultaneously: The fan will be limited to first gear, and the indicator light will show that the left first indicator light is on.

Safety Notes

- a. The fan uses a lithium battery, which can be used while charging.
- b. Do not insert any objects into the fan while it is operating.
- **c.** If the fan will not be used for a long period, remove the battery and store it in a dry place, inside a plastic bag.
- **d.** Do not store the fan in direct sunlight or on a hot surface, as high temperatures may damage it.
- e. Avoid scratching or damaging the fan.
- f. To prolong the battery life, use the fan as instructed in this manual.



This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.





Products that you buy directly from our **Green Lion** website or shop come with a 24-month warranty.

When you buy **Green Lion** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at https://www.greenlion.net/warranty and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check: https://www.greenlion.net/warranty



If you have any questions about this Privacy Policy, please contact us at:

Website: https://www.greenlion.net/

Sales: sales@greenlion.net

Service Support: Support@greenlion.net

Telegram: @greenlion_global Instagram: @greenlion_global