



Green Lion
GM-93X
MICROPHONE

SKU: GNGM93XMICBK
Model No: GM-93X

Table of Contents

Product Overview	2
Specifications	2
Package Contents	3
Usage Method	4
Microphone Multi-function Button	5
Microphone Indicator Lights	5
Receiver Volume Buttons	6
Receiver Indicator Lights	6
Digital Screen Details	7
Charging Your Phone	8
FCC Statement	8
Disposal	9
Warranty	10
Contact Us	10

Product Overview

The Green Lion GM-93X Microphone is a compact wireless audio solution designed for clear and reliable sound capture with Type-C devices. Featuring two microphones and a single receiver, it delivers 360-degree pickup with stable digital transmission for consistent audio quality in various recording environments. With intelligent noise reduction and a dedicated reverb mode, it helps produce clean, natural sound whether you are recording videos, streaming, or conducting interviews. The plug-and-play design ensures instant setup without additional apps, while the 40-meter transmission range allows flexible movement during use. A three-level volume control gives you better command over audio output, and the portable charging case extends total usage time up to 14 hours, making the GM-93X a practical choice for creators who need dependable wireless audio on the go.

Specifications

Model No.	GM-93X
Material	ABS
Battery	80 mAh(Mic),400 mAh(case)
Charging Case Input	DC 4.5-5.2 V
Charging Port	USB Type-C
Charging Time	1.5-2 hours

Single Mic Battery Life	Up to 6 hours
Battery Life (with case)	Up to 14 hours
Signal-to-Noise Ratio (SNR)	≥ 65 dB
Noise Reduction	20 dB
Transmission Protocol	2.5G
Latency	≤ 20 ms
Frequency Response	20 Hz-20 kHz
Transmission Range	Up to 40 m
Product Weight	66 g
Case Dimensions	82.5 x 35 x 32 mm


Package Contents



Charging Case x1




Microphone x2




Receiver x1

Usage Method


1. Remove the microphone and the receiver

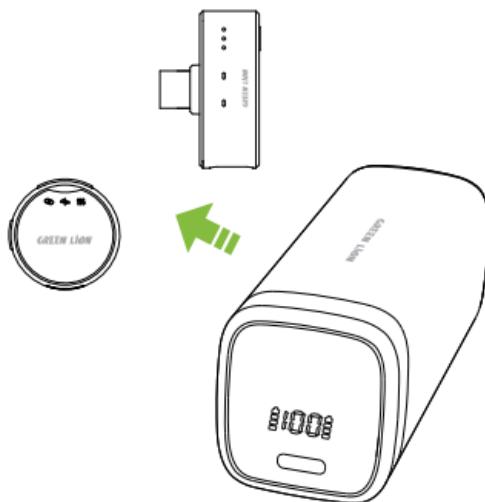

2. Insert the receiver into the phone (the microphone and the receiver indicator lights remain on for use).

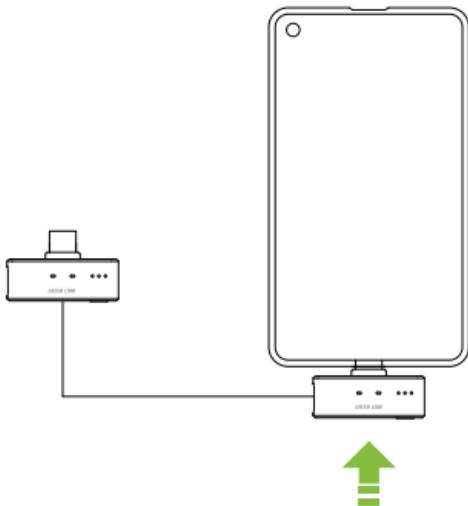

Microphone Multi-function Button

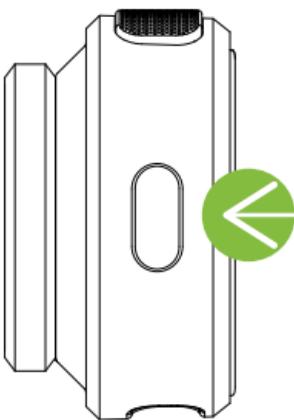

1. Long-press: Power On/Off
2. Single Click: Noise Reduction Mode
3. Double-Click: Reverb Mode
4. Triple-Click: Mute Mode

Microphone Indicator Lights



- Blue light blinking slowly: Connecting
- Blue light steady on: Connected
- Green light slowly blinking: Charging
- Green light off: Fully charged
- Red light blinking: Low battery
- Red light steady on: Microphone muted




Blue light steady on: Noise reduction enabled



Blue light steady on: Reverb enabled

Receiver Volume Buttons

Increase or decrease volume by pressing the volume button.




Receiver Indicator Lights

1. Pairing Indicator Lights

Blue light steady on: Paired

Blue light flashing slowly: Pairing in progress




2. Microphone Volume Indicator Lights

Volume level 1 •

Volume level 2 • •

Volume level 3 • • •

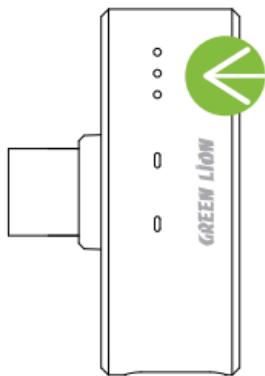

Digital Screen Details

1. Microphone charging indicator


2. Charging case power indicator



Charging Port

Charging Your Phone

You can charge your phone directly through the receiver's port during recording or live streaming without interrupting use.

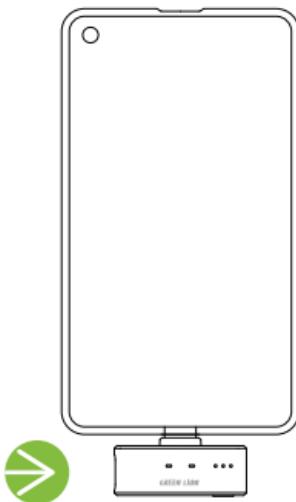

FCC Statement

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
 - (1) This device may not cause harmful interference; and
 - (2) This device must accept any interference received, including interference that may cause undesired operation.
2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against

harmful interference in a residential installation.

This equipment generates and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for assistance.

RF warning statement:

The device has been evaluated to meet general RF exposure requirements.

The device can be used in portable exposure conditions without restriction.

Disposal

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.



Warranty

Products that you buy directly from our **Green Lion** website or shop come with a 24-month warranty.

When you buy **Green Lion** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at <https://www.greenlion.net/warranty> and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check:

<https://www.greenlion.net/warranty>

Contact Us

If you have any questions about this Privacy Policy, please contact us at:

Website: <https://www.greenlion.net/>

Sales: sales@greenlion.net

Service Support: Support@greenlion.net

Telegram: [@greenlion_global](https://t.me/greenlion_global)

Instagram: [@greenlion_global](https://www.instagram.com/greenlion_global)